

## BTA16-600CW3G, BTA16-800CW3G,

RoHS





### Description

Designed for high performance full-wave ac control applications where high noise immunity and high commutating di/dt are required.


### Features

- Blocking Voltage to 800 V
- On-State Current Rating of 16 A RMS at 25°C
- Uniform gate trigger for Quadrants I, II, and III.
- High Immunity to dv/dt – 1000 V/μs minimum at 125°C
- Minimizes Snubber Networks for Protection
- Industry Standard TO-220AB Package
- High Commutating di/dt – 8.5A/ms minimum at 125°C
- Internally Isolated (2500 V<sub>RMS</sub>)
- These components are Pb-Free and are RoHS Compliant

### Pin Out



### Schematic Symbol

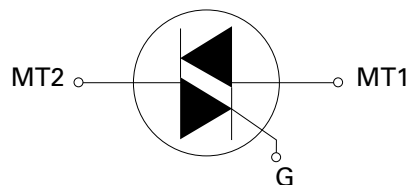

### Additional Information



Datasheet



Resources



Samples

### Maximum Ratings ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

| Rating                                                                                                                      | Symbol                               | Value                                 | Unit               |
|-----------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------|--------------------|
| Peak Repetitive Off-State Voltage (Note 1)<br>(Gate Open, Sine Wave 50 to 60 Hz, $T_J = -40^\circ$ to $125^\circ\text{C}$ ) | $V_{\text{DRM}}$<br>$V_{\text{RRM}}$ | 600<br>800                            | V                  |
| On-State RMS Current (Full Cycle Sine Wave, 60 Hz, $T_C = 80^\circ\text{C}$ )                                               | $I_{\text{T(RMS)}}$                  | 12                                    | A                  |
| Peak Non-Repetitive Surge Current<br>(One Full Cycle Sine Wave, 60 Hz, $T_C = 25^\circ\text{C}$ )                           | $I_{\text{TSM}}$                     | 125                                   | A                  |
| Circuit Fusing Consideration ( $t = 8.3$ ms)                                                                                | $I^2t$                               | 78                                    | A <sup>2</sup> sec |
| Non-Repetitive Surge Peak Off-State Voltage<br>( $T_J = 25^\circ\text{C}$ , $t = 10$ ms)                                    | $V_{\text{DSM}}/V_{\text{RSM}}$      | $V_{\text{DSM}}/V_{\text{RSM}} + 100$ | V                  |
| Peak Gate Current ( $T_J = 125^\circ\text{C}$ , $t = 20$ ms)                                                                | $I_{\text{GM}}$                      | 4.0                                   | W                  |
| Peak Gate Power (Pulse Width $\leq 1.0$ $\mu\text{s}$ , $T_C = 80^\circ\text{C}$ )                                          | $P_{\text{GM}}$                      | 20                                    | W                  |
| Average Gate Power ( $T_J = 125^\circ\text{C}$ )                                                                            | $P_{\text{G(AV)}}$                   | 1.0                                   | W                  |
| Operating Junction Temperature Range                                                                                        | $T_J$                                | -40 to +125                           | $^\circ\text{C}$   |
| Storage Temperature Range                                                                                                   | $T_{\text{stg}}$                     | -40 to +125                           | $^\circ\text{C}$   |
| RMS Isolation Voltage ( $t = 300$ ms, R.H. $\leq 30\%$ , $T_A = 25^\circ\text{C}$ )                                         | $V_{\text{iso}}$                     | 2500                                  | V                  |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1.  $V_{\text{DRM}}$  and  $V_{\text{RRM}}$  for all types can be applied on a continuous basis. Ratings apply for zero or negative gate voltage; however, positive gate voltage shall not be applied concurrent with negative potential on the anode. Blocking voltages shall not be tested with a constant current source such that the voltage ratings of the devices are exceeded.

### Thermal Characteristics

| Rating                                                                         | Symbol                                         | Value     | Unit               |
|--------------------------------------------------------------------------------|------------------------------------------------|-----------|--------------------|
| Thermal Resistance, Junction-to-Case (AC)<br>Junction-to-Ambient               | $R_{\theta\text{JC}}$<br>$R_{\theta\text{JA}}$ | 2.5<br>60 | $^\circ\text{C/W}$ |
| Maximum Lead Temperature for Soldering Purposes, 1/8" from case for 10 seconds | $T_L$                                          | 260       | $^\circ\text{C}$   |

### Electrical Characteristics - OFF ( $T_J = 25^\circ\text{C}$ unless otherwise noted ; Electricals apply in both directions)

| Characteristic                                                                             | Symbol                               | Min | Typ | Max   | Unit |
|--------------------------------------------------------------------------------------------|--------------------------------------|-----|-----|-------|------|
| Peak Repetitive Blocking Current<br>( $V_D = V_{\text{DRM}} = V_{\text{RRM}}$ ; Gate Open) | $I_{\text{DRM}}$<br>$I_{\text{RRM}}$ | -   | -   | 0.005 | mA   |
|                                                                                            |                                      | -   | -   | 2.0   |      |

### Electrical Characteristics - ON ( $T_J = 25^\circ\text{C}$ unless otherwise noted; Electricals apply in both directions)

| Characteristic                                                                   | Symbol          | Min | Typ | Max  | Unit |
|----------------------------------------------------------------------------------|-----------------|-----|-----|------|------|
| Forward On-State Voltage (Note 2) ( $I_{\text{TM}} = \pm 17$ A Peak)             | $V_{\text{TM}}$ | -   | -   | 1.55 | V    |
| Gate Trigger Current (Continuous dc) ( $V_D = 12$ V, $R_L = 30$ $\Omega$ )       | MT2(+), G(+)    | 2.0 | -   | 35   | mA   |
|                                                                                  | MT2(+), G(-)    | 2.0 | -   | 35   |      |
|                                                                                  | MT2(-), G(-)    | 2.0 | -   | 35   |      |
| Holding Current<br>( $V_D = 12$ V, Gate Open, Initiating Current = $\pm 500$ mA) | $I_{\text{H}}$  | -   | -   | 50   | mA   |
| Latching Current ( $V_D = 12$ V, $I_{\text{G}} = 1.2 \times I_{\text{GT}}$ )     | MT2(+), G(+)    | -   | -   | 60   | mA   |
|                                                                                  | MT2(+), G(-)    | -   | -   | 65   |      |
|                                                                                  | MT2(-), G(-)    | -   | -   | 60   |      |
| Gate Trigger Voltage ( $V_D = 12$ V, $R_L = 30$ $\Omega$ )                       | MT2(+), G(+)    | 0.5 | -   | 1.7  | V    |
|                                                                                  | MT2(+), G(-)    | 0.5 | -   | 1.1  |      |
|                                                                                  | MT2(-), G(-)    | 0.5 | -   | 1.1  |      |
| Gate Non-Trigger Voltage ( $T_J = 125^\circ\text{C}$ )                           | MT2(+), G(+)    | 0.2 | -   | -    | V    |
|                                                                                  | MT2(+), G(-)    | 0.2 | -   | -    |      |
|                                                                                  | MT2(-), G(-)    | 0.2 | -   | -    |      |

2. Indicates Pulse Test: Pulse Width  $\leq 2.0$  ms, Duty Cycle  $\leq 2\%$ .


### Dynamic Characteristics

| Characteristic                                                                                                                                       | Symbol      | Min  | Typ | Max | Unit             |
|------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|------|-----|-----|------------------|
| Rate of Change of Commutating Current, See Figure 9.<br>(Gate Open, $T_J = 125^\circ\text{C}$ , No Snubber)                                          | $(di/dt)_c$ | 8.5  | –   | –   | A/ms             |
| Critical Rate of Rise of On-State Current<br>( $T_J = 125^\circ\text{C}$ , $f = 120\text{ Hz}$ , $I_G = 2 \times I_{GT}$ , $tr \leq 100\text{ ns}$ ) | $di/dt$     | –    | –   | 50  | A/ $\mu\text{s}$ |
| Critical Rate of Rise of Off-State Voltage<br>( $V_D = 0.66 \times V_{DRM}$ , Exponential Waveform, Gate Open, $T_J = 125^\circ\text{C}$ )           | $dV/dt$     | 1000 | –   | –   | V/ $\mu\text{s}$ |

### Voltage Current Characteristic of SCR


| Symbol    | Parameter                                 |
|-----------|-------------------------------------------|
| $V_{DRM}$ | Peak Repetitive Forward Off State Voltage |
| $I_{DRM}$ | Peak Forward Blocking Current             |
| $V_{RRM}$ | Peak Repetitive Reverse Off State Voltage |
| $I_{RRM}$ | Peak Reverse Blocking Current             |
| $V_{TM}$  | Maximum On State Voltage                  |
| $I_H$     | Holding Current                           |

### Quadrant Definitions for a Triac

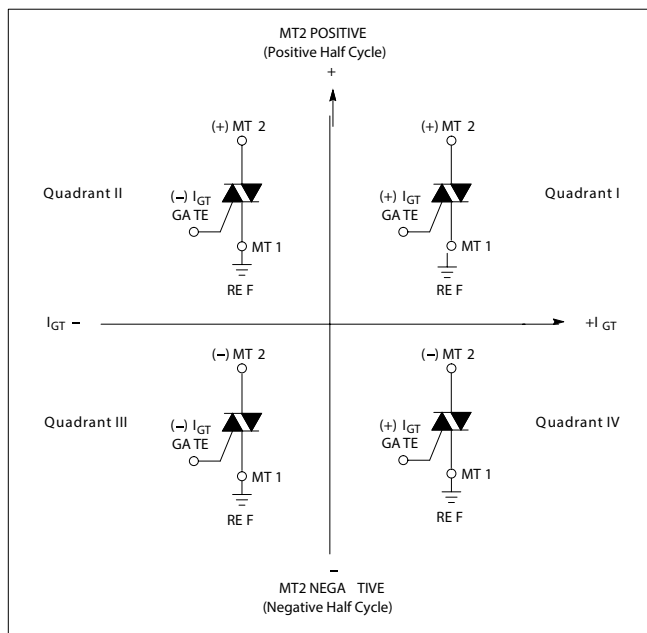


All polarities are referenced to MT1.


With in-phase signals (using standard AC lines) quadrants I and III are used

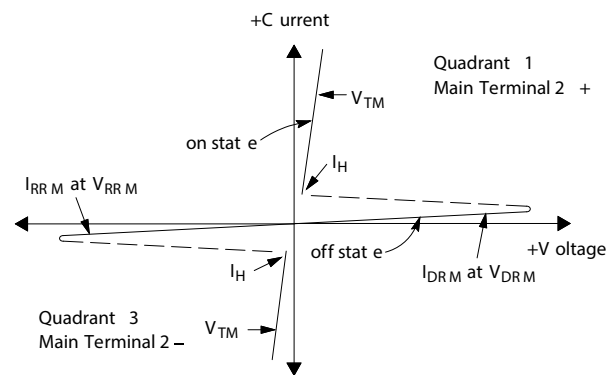


**Figure 1. RMS Current Derating**

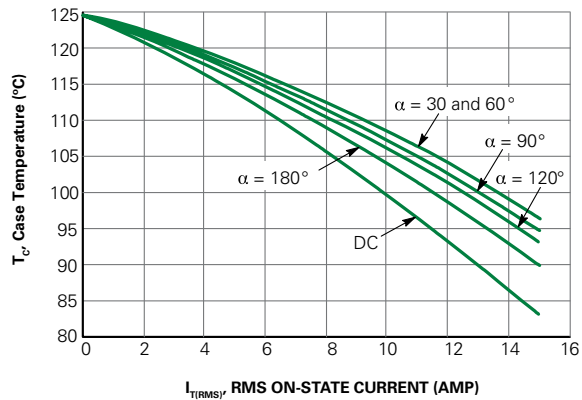


**Figure 2. On-State Power Dissipation**

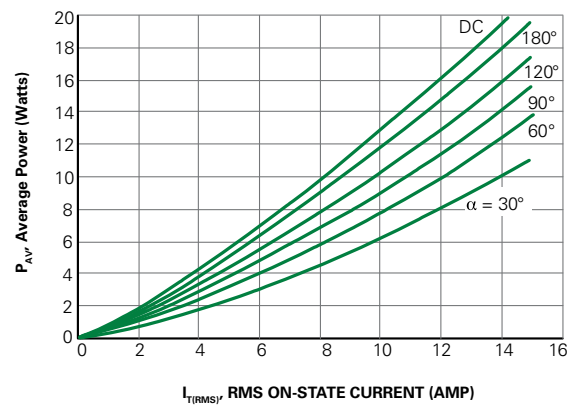


**Figure 3. On-State Characteristics**

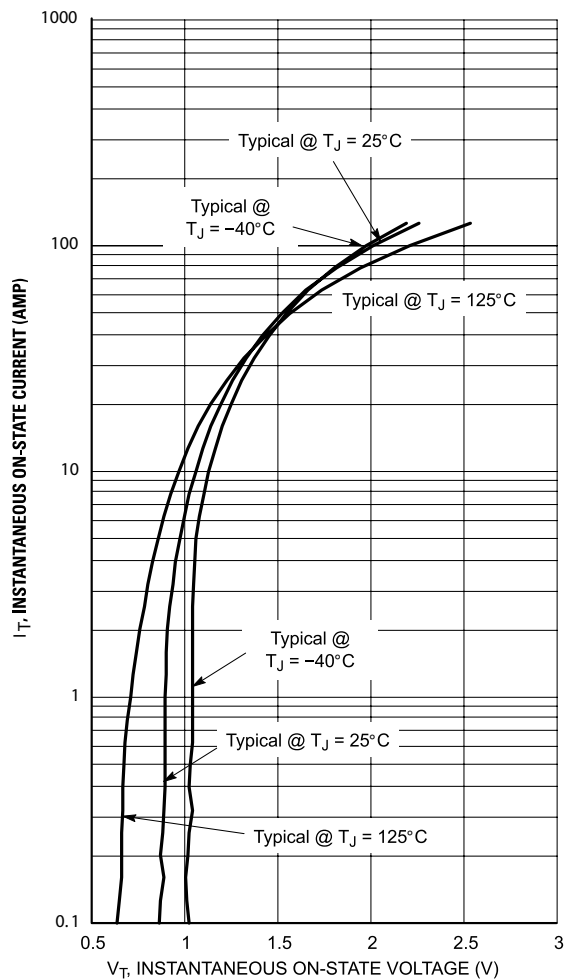


**Figure 4. Thermal Response**

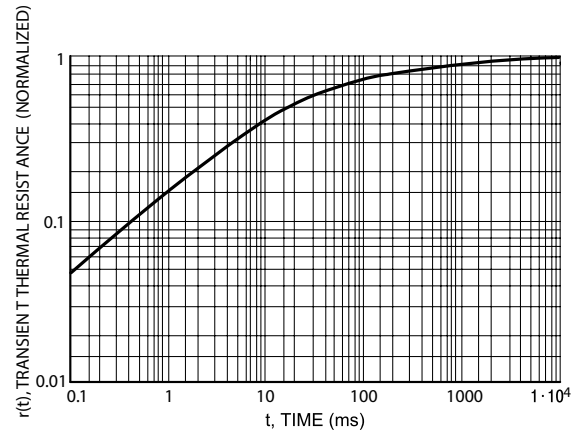


**Figure 5. Hold Current Variation**

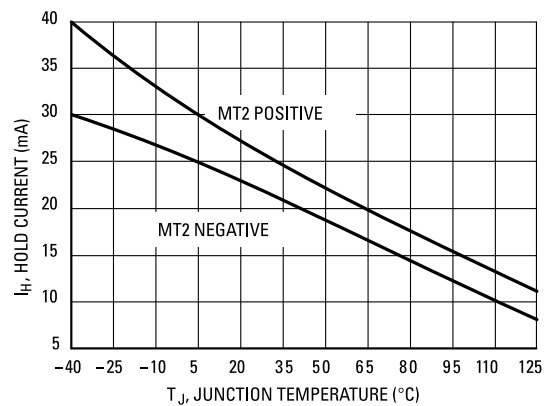


**Figure 6. Gate Trigger Current Variation**

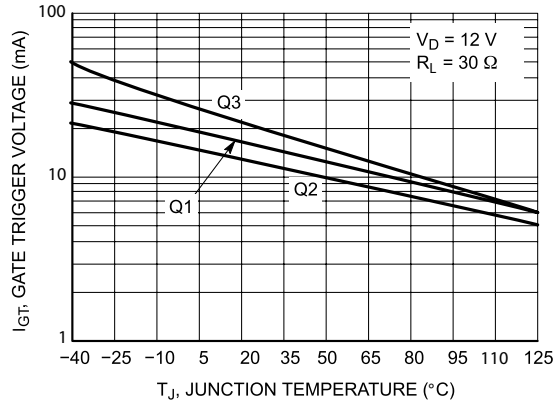


**Figure 7. Gate Trigger Voltage Variation**

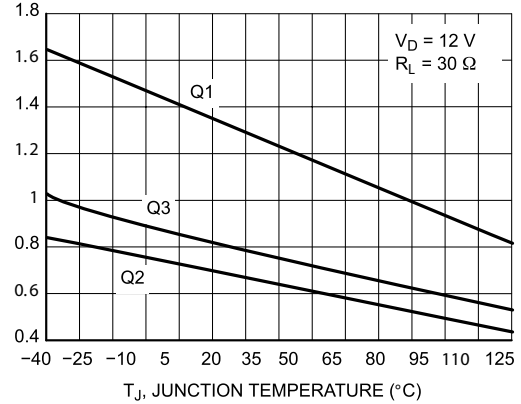


**Figure 9. Simplified Test Circuit to Measure the Critical Rate of Rise of Commutating Current ( $di/dt$ )**

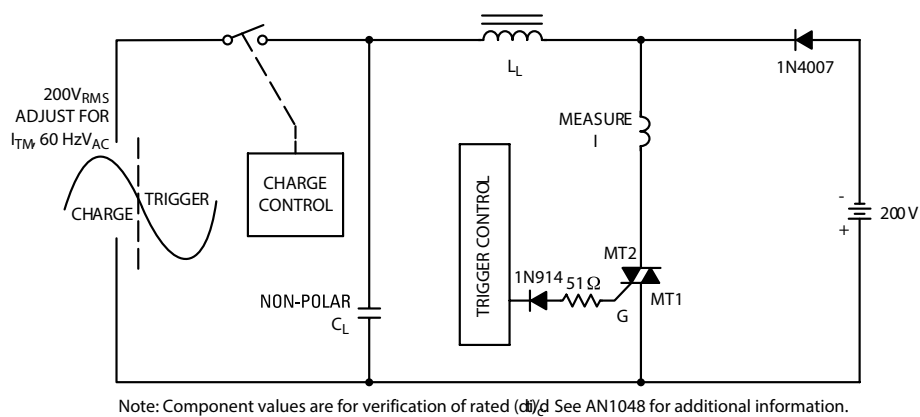

### Dimensions

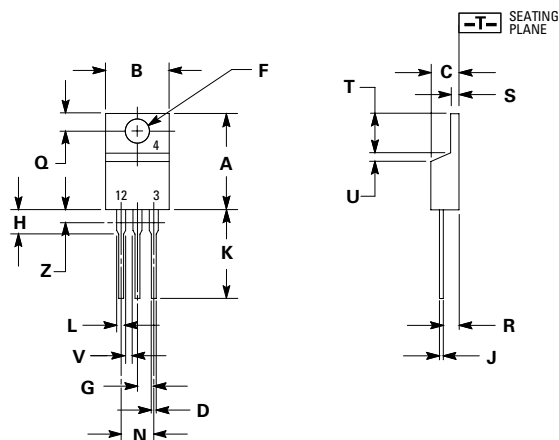


### Part Marking System



**TO-220AB  
CASE 221A  
STYLE 12**

x = 6 or 8  
Y = Year  
M = Month  
A = Assembly Site  
XX = Lot Serial Code  
G = Pb-Free Package



| Dim | Inches |       | Millimeters |       |
|-----|--------|-------|-------------|-------|
|     | Min    | Max   | Min         | Max   |
| A   | 0.590  | 0.620 | 14.99       | 15.75 |
| B   | 0.380  | 0.420 | 9.65        | 10.67 |
| C   | 0.178  | 0.188 | 4.52        | 4.78  |
| D   | 0.025  | 0.035 | 0.64        | 0.89  |
| F   | 0.142  | 0.147 | 3.61        | 3.73  |
| G   | 0.095  | 0.105 | 2.41        | 2.67  |
| H   | 0.110  | 0.130 | 2.79        | 3.30  |
| J   | 0.018  | 0.024 | 0.46        | 0.61  |
| K   | 0.540  | 0.575 | 13.72       | 14.61 |
| L   | 0.060  | 0.075 | 1.52        | 1.91  |
| N   | 0.195  | 0.205 | 4.95        | 5.21  |
| Q   | 0.105  | 0.115 | 2.67        | 2.92  |
| R   | 0.085  | 0.095 | 2.16        | 2.41  |
| S   | 0.045  | 0.060 | 1.14        | 1.52  |
| T   | 0.235  | 0.255 | 5.97        | 6.47  |
| U   | 0.000  | 0.050 | 0.00        | 1.27  |
| V   | 0.045  | —     | 1.15        | —     |
| Z   | —      | 0.080 | —           | 2.04  |

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

| Pin Assignment |                 |
|----------------|-----------------|
| 1              | Main Terminal 1 |
| 2              | Main Terminal 2 |
| 3              | Gate            |
| 4              | No Connection   |

### Ordering Information

| Device        | Package            | Shipping         |
|---------------|--------------------|------------------|
| BTA16-600CW3G | TO-220AB (Pb-Free) | 500 Units / Rail |
| BTA16-800CW3G | TO-220AB (Pb-Free) | 500 Units / Rail |

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.