

Date: - 29 Oct, 2013

Data Sheet Issue:- 2

# **Rectifier Diode**

# Types W3842MC240 and W3842MC280

Development Type No.: WX199MC280

# **Absolute Maximum Ratings**

	VOLTAGE RATINGS	MAXIMUM LIMITS	UNITS
$V_{RRM}$	Repetitive peak reverse voltage, (note 1)	2400-2800	V
$V_{RSM}$	Non-repetitive peak reverse voltage, (note 1)	2500-2900	V

	OTHER RATINGS	MAXIMUM LIMITS	UNITS
$I_{F(AV)M}$	Maximum average forward current, T <sub>sink</sub> =55°C, (note 2)	3842	Α
$I_{F(AV)M}$	Maximum average forward current. T <sub>sink</sub> =100°C, (note 2)	2664	Α
I <sub>F(AV)M</sub>	Maximum average forward current. T <sub>sink</sub> =100°C, (note 3)	1567	Α
I <sub>F(RMS)M</sub>	Nominal RMS forward current, T <sub>sink</sub> =25°C, (note 2)	7067	Α
I <sub>F(d.c.)</sub>	D.C. forward current, T <sub>sink</sub> =25°C, (note 4)	6180	Α
I <sub>FSM</sub>	Peak non-repetitive surge t <sub>p</sub> =10ms, V <sub>m</sub> =60%V <sub>RRM</sub> , (note 5)	35.1	kA
I <sub>FSM2</sub>	Peak non-repetitive surge t <sub>p</sub> =10ms, V <sub>m</sub> ≤10V, (note 5)	38.6	kA
l <sup>2</sup> t	$I^2$ t capacity for fusing t <sub>p</sub> =10ms, V <sub>rm</sub> =60%V <sub>RRM</sub> , (note 5)	6.16×10 <sup>6</sup>	A <sup>2</sup> s
l <sup>2</sup> t	I <sup>2</sup> t capacity for fusing t <sub>p</sub> =10ms, V <sub>rm</sub> ≤10V, (note 5)	7.45×10 <sup>6</sup>	A <sup>2</sup> s
T <sub>j op</sub>	Operating temperature range	-40 to +160	°C
$T_{stg}$	Storage temperature range	-55 to +160	°C

# Notes:-

- 1) De-rating factor of 0.13% per °C is applicable for T<sub>i</sub> below 25°C.
- 2) Double side cooled, single phase; 50Hz, 180° half-sinewave.
- 3) Cathode side cooled, single phase; 50Hz, 180° half-sinewave.
- 4) Double side cooled.
- 5) Half-sinewave, 160°C T<sub>i</sub> initial.



# **Characteristics**

	PARAMETER	MIN.	TYP.	MAX.	TEST CONDITIONS (Note 1)	UNITS
$V_{FM}$	Maximum peak forward voltage	-	-	1.20	I <sub>FM</sub> =3000A	V
$V_{FM}$	Maximum peak forward voltage	-	-	1.75	I <sub>FM</sub> =8000A	V
$V_{T0}$	Threshold voltage	-	-	0.831	Valid from 2000A to 6000A	V
r⊤	Slope resistance	-	-	0.118	Valid from 2000A to 6000A	mΩ
$I_{RRM}$	Peak reverse current	-	-	50	Rated V <sub>RRM</sub>	mA
Q <sub>rr</sub>	Recovered charge	-	4200	-		μC
$Q_{ra}$	Recovered charge, 50% Chord	-	3200	3600	I <sub>TM</sub> =1000A, t <sub>p</sub> =1000μs, di/dt=10A/μs,	μC
I <sub>rm</sub>	Reverse recovery current	-	190	-	V <sub>r</sub> =100V	
t <sub>rr</sub>	Reverse recovery time, 50% chord	-	34	-		μs
		-	-	0.0140	Double side cooled	K/W
$R_{thJK}$	Thermal resistance, junction to heatsink	-	-	0.0265	Anode side cooled	K/W
		-	-	0.0297	Cathode side cooled	K/W
F	Mounting force	25	-	31	Note 2	kN
$W_t$	Weight		530			g

# Notes:-

- 1) Unless otherwise indicated T<sub>j</sub>=160°C.
- 2) For other clamp forces, please consult factory.



# **Notes on Ratings and Characteristics**

#### 1.0 Voltage Grade Table

Voltage Grade	V <sub>RRM</sub> V	V <sub>RSM</sub> V	V <sub>R</sub> DC V
24	2400	2500	1450
28	2800	2900	1650

#### 2.0 Extension of Voltage Grades

This report is applicable to other voltage grades when supply has been agreed by Sales/Production.

#### 3.0 De-rating Factor

A blocking voltage de-rating factor of 0.13%/°C is applicable to this device for T<sub>i</sub> below 25°C.

#### 4.0 Snubber Components

When selecting snubber components, care must be taken not to use excessively large values of snubber capacitor or excessively small values of snubber resistor. Such excessive component values may lead to device damage due to the large resultant values of snubber discharge current. If required, please consult the factory for assistance.

#### 5.0 Computer Modelling Parameters

#### 5.1 Device Dissipation Calculations

$$I_{AV} = \frac{-V_{T0} + \sqrt{{V_{T0}}^2 + 4 \cdot ff^2 \cdot r_T \cdot W_{AV}}}{2 \cdot ff^2 \cdot r_T} \qquad \qquad W_{AV} = \frac{\Delta T}{R_{th}}$$
 and: 
$$\Delta T = T_{j \max} - T_K$$

Where  $V_{T0}=0.831V$ ,  $r_{T}=0.118m\Omega$ ,

 $R_{\it th}$  = Supplementary thermal impedance, see table below and

ff = Form factor, see table below.

Supplementary Thermal Impedance					
Conduction Angle 6 phase (60°) 3 phase (120°) ½ wave (180°)				d.c.	
Square wave Double Side Cooled	0.01665	0.01581	0.01516	0.0140	
Square wave Cathode Side Cooled	0.03217	0.03147	0.03090	0.0297	
Sine wave Double Side Cooled	0.01612	0.01531	0.01436		
Sine wave Cathode Side Cooled	0.03174	0.03105	0.03022		

Form Factors					
Conduction Angle 6 phase (60°) 3 phase (120°) ½ wave (180°) d.c.					
Square wave	2.449	1.732	1.414	1	
Sine wave	2.778	1.879	1.57		



# 5.2 Calculating V<sub>F</sub> using ABCD Coefficients

The on-state characteristic I<sub>F</sub> vs. V<sub>F</sub>, on page 6 is represented in two ways;

- (i) the well established  $V_{T0}$  and  $r_T$  tangent used for rating purposes and
- (ii) a set of constants A, B, C, D, forming the coefficients of the representative equation for  $V_F$  in terms of  $I_F$  given below:

$$V_F = A + B \cdot \ln(I_F) + C \cdot I_F + D \cdot \sqrt{I_F}$$

The constants, derived by curve fitting software, are given below for both hot and cold characteristics. The resulting values for  $V_F$  agree with the true device characteristic over a current range, which is limited to that plotted.

25°C Coefficients		160°C Coefficients	
Α	0.7570696	Α	0.4876014
В	0.01538751	В	0.02543331
С	4.90758×10 <sup>-5</sup>	С	6.37556×10 <sup>-5</sup>
D	4.231663×10 <sup>-3</sup>	D	5.796792×10 <sup>-3</sup>



# 5.3 D.C. Thermal Impedance Calculation

$$r_{t} = \sum_{p=1}^{p=n} r_{p} \cdot \left(1 - e^{\frac{-t}{\tau_{p}}}\right)$$

Where p = 1 to n, n is the number of terms in the series and:

t = Duration of heating pulse in seconds.

 $r_{\downarrow}$  = Thermal resistance at time t.

 $\begin{array}{ll} r_p = & \text{Amplitude of } p_{th} \text{ term.} \\ \tau_p = & \text{Time Constant of } r_{th} \text{ term.} \end{array}$ 

The coefficients for this device are shown in the tables below:

	D.C. Double Side Cooled						
Term	1 2 3 4						
$r_{p}$	8.594785×10 <sup>-3</sup>	3.308247×10 <sup>-3</sup>	1.039072×10 <sup>-3</sup>	7.916582×10 <sup>-4</sup>			
$ au_p$	0.7185764	0.09970181	0.02165834	5.266433×10 <sup>-3</sup>			

Term	1	2	3
$r_p$	0.02196926	5.845724×10 <sup>-3</sup>	1.904897×10 <sup>-3</sup>
$ au_p$	4.127141	0.1629998	8.832583×10 <sup>-3</sup>

#### 6.0 Reverse recovery ratings

(i)  $Q_{ra}$  is based on 50%  $I_{rm}$  chord as shown in Fig. 1




Fig. 1

(ii)  $Q_{rr}$  is based on a 150 $\mu$ s integration time i.e.

$$Q_{rr} = \int_{0}^{150 \, \mu s} i_{rr}.dt$$

(iii) 
$$K\ Factor = \frac{t_1}{t_2}$$



# **Curves**

Figure 1 – Forward characteristics of Limit device

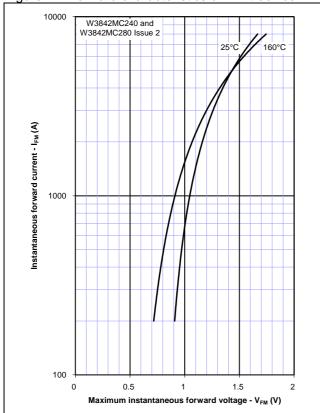


Figure 2 - Transient thermal impedance

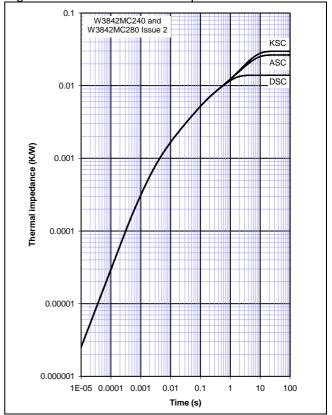


Figure 3 - Maximum Surge Rating

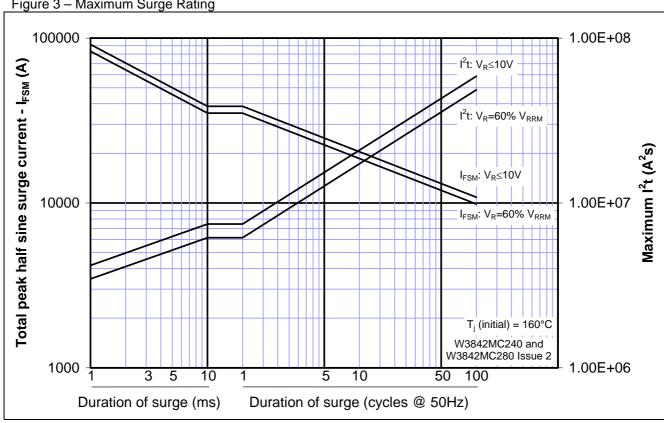




Figure 4 – Total recovered charge, Q<sub>rr</sub>

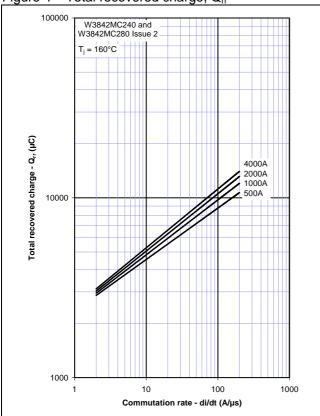


Figure 5 – Recovered charge, Q<sub>ra</sub> (50% chord)

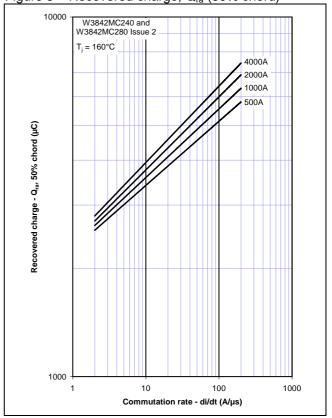


Figure 6 – Peak reverse recovery current, I<sub>rm</sub>

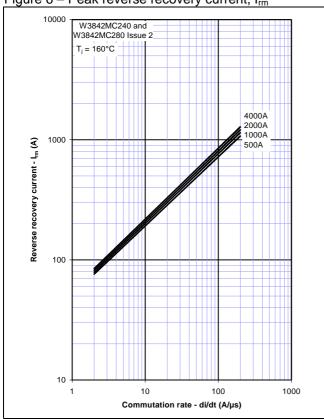


Figure 7 – Maximum recovery time, t<sub>rr</sub> (50% chord)

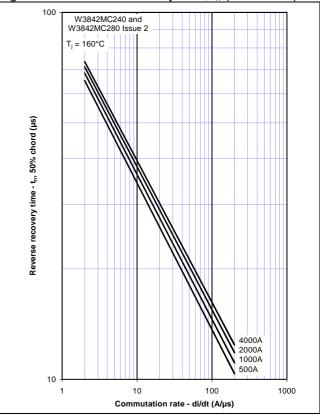




Figure 8 – Forward current vs. Power dissipation – Double Side Cooled

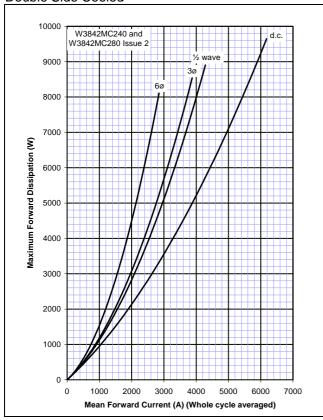


Figure 10 – Forward current vs. Power dissipation – Cathode Side Cooled

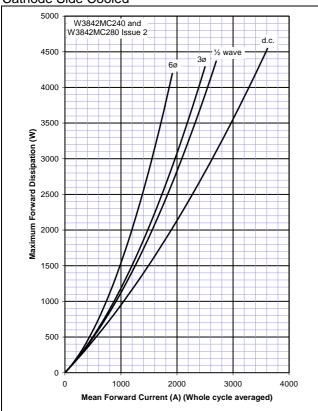


Figure 9 – Forward current vs. Heatsink temperature – Double Side Cooled



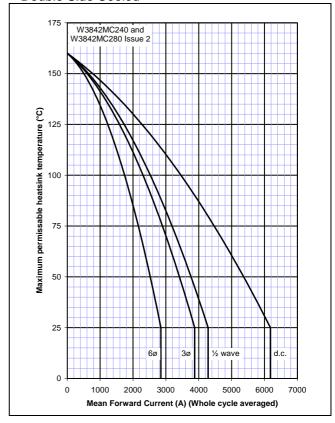


Figure 11 – Forward current vs. Heatsink temperature – Cathode Side Cooled



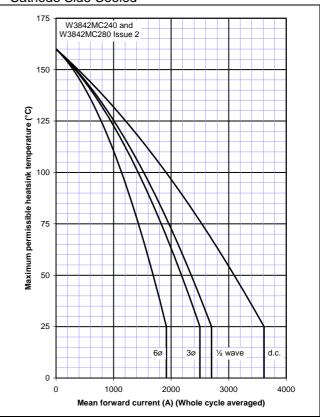

# **Outline Drawing & Ordering Information**

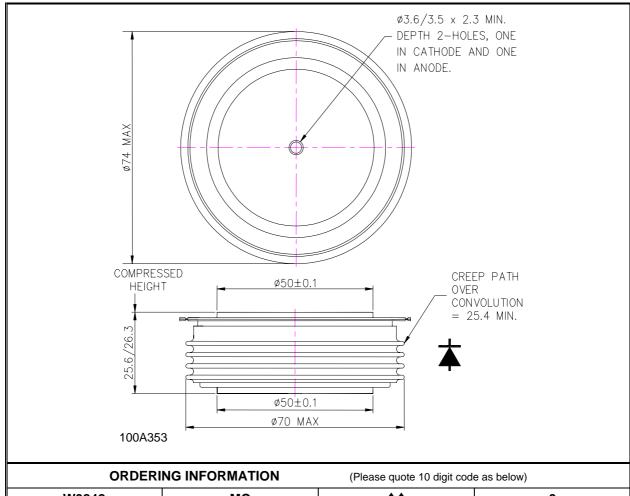

ORDERI	NG INFORMATION	(Please quote 10 digit code as below)		
W3842 MC		<b>**</b>	0	
Fixed Type Code	Fixed Outline Code	Voltage code V <sub>RRM</sub> /100 24 and 28	Fixed code	

Order code: W3842MC240 - 2400V V<sub>RRM</sub>, 26.3mm clamp height capsule.

#### **IXYS Semiconductor GmbH**

Edisonstraße 15 D-68623 Lampertheim Tel: +49 6206 503-0 Fax: +49 6206 503-627 E-mail: marcom@ixys.de

# **IXYS Corporation**

1590 Buckeye Drive Milpitas CA 95035-7418 Tel: +1 (408) 457 9000 Fax: +1 (408) 496 0670 E-mail: sales@ixys.net



www.ixysuk.com

www.ixys.net

#### IXYS UK Westcode Ltd

Langley Park Way, Langley Park, Chippenham, Wiltshire, SN15 1GE. Tel: +44 (0)1249 444524 Fax: +44 (0)1249 659448 E-mail: sales@ixysuk.com

# IXYS Long Beach

IXYS Long Beach, Inc 2500 Mira Mar Ave, Long Beach CA 90815

Tel: +1 (562) 296 6584

Fax: +1 (562) 296 6585 E-mail: service@ixyslongbeach.com

The information contained herein is confidential and is protected by Copyright. The information may not be used or disclosed except with the written permission of and in the manner permitted by the proprietors IXYS UK Westcode Ltd.

In the interest of product improvement, IXYS UK Westcode Ltd reserves the right to change specifications at any time without

prior notice.

Devices with a suffix code (2-letter or letter/digit/letter combination) added to their generic code are not necessarily subject to the conditions and limits contained in this report.

© IXYS UK Westcode Ltd.