


HiPerFAST™ IGBT

ISOPLUS247™

		V_{CES}	I_{C25}	$V_{CE(sat)}$	$t_{fi(typ)}$
IXGR	35N120B	1200 V	70 A	3.3 V	160 ns
IXGR	35N120C	1200 V	70 A	4.0 V	115 ns


(Electrically Isolated Backside)



Symbol	Test Conditions	Maximum Ratings	
V_{CES}	$T_J = 25^\circ\text{C}$ to 150°C	1200	V
V_{CGR}	$T_J = 25^\circ\text{C}$ to 150°C ; $R_{GE} = 1\text{ M}\Omega$	1200	V
V_{GES}	Continuous	± 20	V
V_{GEM}	Transient	± 30	V
I_{C25}	$T_C = 25^\circ\text{C}$	70	A
I_{C90}	$T_C = 90^\circ\text{C}$	35	A
I_{CM}	$T_C = 25^\circ\text{C}$, 1 ms	140	A
SSOA (RBSOA)	$V_{GE} = 15\text{ V}$, $T_{VJ} = 125^\circ\text{C}$, $R_G = 10\text{ }\Omega$ Clamped inductive load	$I_{CM} = 90$ @ $0.8 V_{CES}$	A
P_C	$T_C = 25^\circ\text{C}$	200	W
T_J		-55 ... +150	$^\circ\text{C}$
T_{JM}		150	$^\circ\text{C}$
T_{stg}		-55 ... +150	$^\circ\text{C}$
Maximum lead temperature for soldering 1.6 mm (0.062 in.) from case for 10 s		300	$^\circ\text{C}$
Weight		5	g

ISOPLUS 247

 E153432

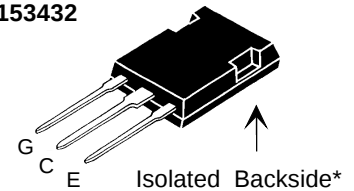

G = Gate,
E = Emitter

C = Collector

* Patent pending

Features

- DCB Isolated mounting tab
- Meets TO-247AD package Outline
- High current handling capability
- MOS Gate turn-on
- drive simplicity

Applications


- Uninterruptible power supplies (UPS)
- Switched-mode and resonant-mode power supplies
- AC motor speed control
- DC servo and robot drives
- DC choppers

Advantages

- Easy assembly
- High power density

Symbol	Test Conditions	Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified)		
		Min.	Typ.	Max.
BV_{CES}	$I_C = 1\text{ mA}$, $V_{GE} = 0\text{ V}$	1200		V
$V_{GE(th)}$	$I_C = 750\text{ }\mu\text{A}$, $V_{CE} = V_{GE}$	2.5		5.0 V
I_{CES}	$V_{CE} = V_{CES}$ $V_{GE} = 0\text{ V}$; note 1 $T_J = 125^\circ\text{C}$			250 μA 5 mA
I_{GES}	$V_{CE} = 0\text{ V}$, $V_{GE} = \pm 20\text{ V}$			$\pm 100\text{ nA}$
$V_{CE(sat)}$	$I_C = I_{C90}$, $V_{GE} = 15\text{ V}$ $T_J = 125^\circ\text{C}$	35N120B		3.3 V
		35N120C	2.7	4.0 V
			3.4	V

Symbol	Test Conditions	Characteristic Values (T _J = 25°C, unless otherwise specified)				
		min.	typ.	max.		
g _{fs}	I _C = I _{C90} , V _{CE} = 10 V, Note1	30	40	S		
C _{ies} C _{oes} C _{res}	V _{CE} = 25 V, V _{GE} = 0 V, f = 1 MHz		4620 260 90	pF pF pF		
Q _g Q _{ge} Q _{gc}		I _C = I _{C90} , V _{GE} = 15 V, V _{CE} = 0.5 V _{CES}		170 28 57	nC nC nC	
t _{d(on)} t _{ri} t _{d(off)} t _{fi} E _{off}			Inductive load, T_J = 25°C I _C = I _{C90} , V _{GE} = 15 V V _{CE} = 0.8 V _{CES} , R _G = R _{off} = 4.7 Ω Remarks: Switching times may increase for V _{CE} (Clamp) > 0.8 V _{CES} , higher T _J or increased R _G		50 27 180 150 160 115 3.8 3.0	ns ns ns ns ns ns mJ mJ
t _{d(on)} t _{ri} E _{on} t _{d(off)} t _{fi} E _{off}	Inductive load, T_J = 125°C I _C = I _{C90} , V _{GE} = 15 V V _{CE} = 0.8 V _{CES} , R _G = R _{off} = 4.7 Ω Remarks: Switching times may increase for V _{CE} (Clamp) > 0.8 V _{CES} , higher T _J or increased R _G				55 31 2.6 300 220 360 260 8.0 6.2	ns ns mJ ns ns ns ns mJ mJ
R _{thJC} R _{thCK}					0.5 0.15	K/W K/W

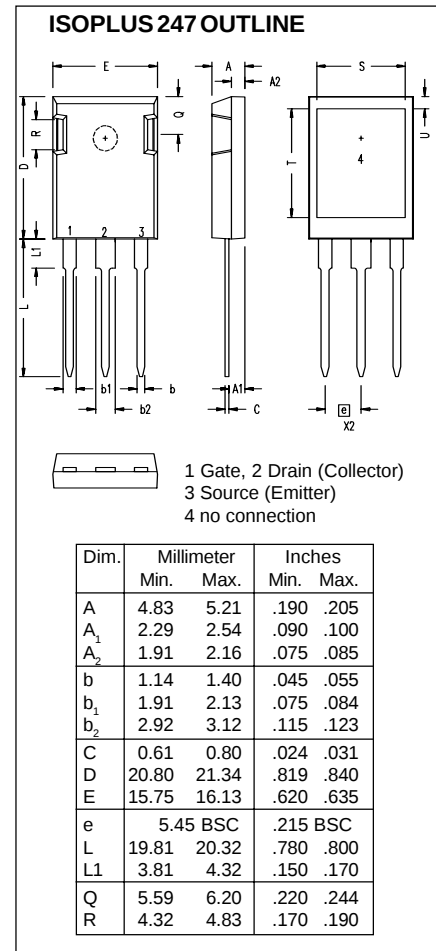

Note: 1. Pulse test, $t_p \leq 300\text{ ms}$, duty cycle: $d \leq 2\%$



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.