


# MINI® FL1 SERIES

## 32V PCB FUSE HOLDER

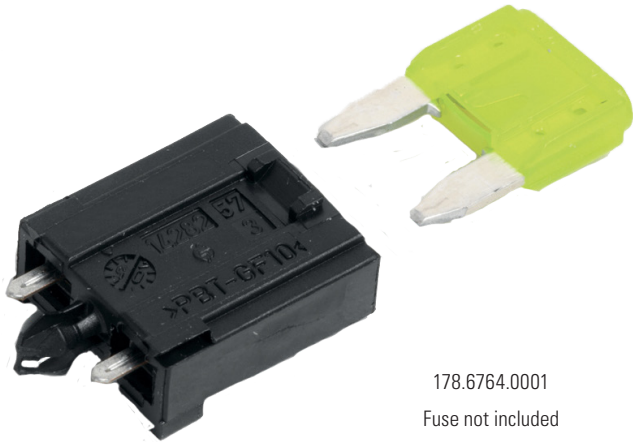

178.6764.0001  
Fuse not included

### Description

The MINI® FL1 Series 32V PCB Fuse Holder makes it simple to add a single MINI® blade fuse up to 30 amps (sold separately) to a printed circuit board (PCB). If you need circuit protection for multiple circuits, nearly any number of MINI® FL1 Series fuse holders can be mounted in a row.

As a MINI® fuse holder for PCB applications, it features a heat-resistant, black, thermoplastic body with a UL 94 V-0 flammability rating. This makes it ideal for holding an automotive fuse that protects accessory, sensor, and vehicle control circuits. Its tin-plated copper alloy fuse holder terminals fit into a 7.62mm pitch.

### Web Resources

Download 2D print, installation guide and technical resources at: [littelfuse.com/MINIFL1](http://littelfuse.com/MINIFL1)

### Ordering Information

PART NUMBER	DESCRIPTION	CURRENT RATING MAX	FUSE TYPE	MOUNTING METHOD	MAX VOLTAGE RATING
178.6764.0001	Holder For FL1 (MINI) PCB 100 PC	30 Amps	MINI	PCB Mount	32 VDC

### Specifications

<b>Current Rating Continuous:</b>	22 Amps
<b>Current Rating Max:</b>	30 Amps
<b>Fuse Type:</b>	MINI
<b>Flammability Rating:</b>	UL 94 V-0
<b>Input Terminals:</b>	MINI Fuse Blades
<b>Mounting Method:</b>	PCB Mount
<b>Max Voltage Rating:</b>	32 VDC

### Applications

- Automotive PCB Fusing
- Accessory, Sensor, or Vehicle Control Circuit Protection

### Features And Benefits

- Compatible with MINI® blade fuses up to 30 amps (sold separately)
- Made for installing a MINI® blade fuse on a printed circuit board (PCB)
- Multiple MINI® FL1 Series fuse holders can be mounted in a row
- Heat-resistant, black, glass-fiber-reinforced PBT body with a UL 94 V-0 flammability rating is ideal for automotive applications
- Tin-plated copper alloy terminals fit into a 7.62mm pitch