


## GenX3™ 600V IGBT with Diode

**IXGX72N60C3H1\***  
\*Obsolete Part Number


High-Speed PT IGBT for  
40-100kHz Switching



$V_{CES} = 600V$   
 $I_{C110} = 72A$   
 $V_{CE(sat)} \leq 2.5V$   
 $t_{fi(typ)} = 55ns$

| Symbol                        | Test Conditions                                                                      | Maximum Ratings                         |             |
|-------------------------------|--------------------------------------------------------------------------------------|-----------------------------------------|-------------|
| $V_{CES}$                     | $T_J = 25^{\circ}C$ to $150^{\circ}C$                                                | 600                                     | V           |
| $V_{CGR}$                     | $T_J = 25^{\circ}C$ to $150^{\circ}C$ , $R_{GE} = 1M\Omega$                          | 600                                     | V           |
| $V_{GES}$                     | Continuous                                                                           | $\pm 20$                                | V           |
| $V_{GEM}$                     | Transient                                                                            | $\pm 30$                                | V           |
| $I_{C25}$                     | $T_C = 25^{\circ}C$ (Limited by Leads)                                               | 75                                      | A           |
| $I_{C110}$                    | $T_C = 110^{\circ}C$ (Chip Capability)                                               | 72                                      | A           |
| $I_{CM}$                      | $T_C = 25^{\circ}C$ , 1ms                                                            | 360                                     | A           |
| $I_A$                         | $T_C = 25^{\circ}C$                                                                  | 50                                      | A           |
| $E_{AS}$                      | $T_C = 25^{\circ}C$                                                                  | 500                                     | mJ          |
| <b>SSOA</b><br><b>(RBSOA)</b> | $V_{GE} = 15V$ , $T_{VJ} = 125^{\circ}C$ , $R_G = 2\Omega$<br>Clamped Inductive Load | $I_{CM} = 150$<br>$V_{CE} \leq V_{CES}$ | A           |
| $P_C$                         | $T_C = 25^{\circ}C$                                                                  | 540                                     | W           |
| $T_J$                         |                                                                                      | -55 ... +150                            | $^{\circ}C$ |
| $T_{JM}$                      |                                                                                      | 150                                     | $^{\circ}C$ |
| $T_{stg}$                     |                                                                                      | -55 ... +150                            | $^{\circ}C$ |
| $M_F$                         | Mounting Force                                                                       | 20..120 / 4.5..27                       | N/lb.       |
| $T_L$                         | Maximum Lead Temperature for Soldering                                               | 300                                     | $^{\circ}C$ |
| $T_{SOLD}$                    | 1.6mm (0.062 in.) from Case for 10s                                                  | 260                                     | $^{\circ}C$ |
| <b>Weight</b>                 | PLUS247                                                                              | 6                                       | g           |

PLUS247



G = Gate      C = Collector  
E = Emitter      Tab = Collector

### Features

- Optimized for Low Switching Losses
- Square RBSOA
- Avalanche Rated
- Anti-Parallel Ultra Fast Diode
- International Standard Package

### Advantages

- High Power Density
- Low Gate Drive Requirement


### Applications

- Power Inverters
- UPS
- Motor Drives
- SMPS
- PFC Circuits
- Battery Chargers
- Welding Machines
- Lamp Ballasts

| Symbol        | Test Conditions<br>( $T_J = 25^{\circ}C$ , Unless Otherwise Specified) | Characteristic Values |      |                     |
|---------------|------------------------------------------------------------------------|-----------------------|------|---------------------|
|               |                                                                        | Min.                  | Typ. | Max.                |
| $V_{GE(th)}$  | $I_C = 250\mu A$ , $V_{CE} = V_{GE}$                                   | 3.0                   |      | 5.5 V               |
| $I_{CES}$     | $V_{CE} = V_{CES}$ , $V_{GE} = 0V$<br>$T_J = 125^{\circ}C$             |                       |      | 250 $\mu A$<br>3 mA |
| $I_{GES}$     | $V_{CE} = 0V$ , $V_{GE} = \pm 20V$                                     |                       |      | $\pm 100$ nA        |
| $V_{CE(sat)}$ | $I_C = 50A$ , $V_{GE} = 15V$ , Note 1<br>$T_J = 125^{\circ}C$          | 2.10<br>1.65          |      | 2.50 V              |

| Symbol       | Test Conditions<br>( $T_J = 25^\circ\text{C}$ , Unless Otherwise Specified)                                                                 | Characteristic Values |      |                        |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------|------------------------|
|              |                                                                                                                                             | Min.                  | Typ. | Max.                   |
| $g_{fs}$     | $I_C = 50\text{A}$ , $V_{CE} = 10\text{V}$ , Note 1                                                                                         | 33                    | 55   | S                      |
| $C_{ies}$    | $V_{CE} = 25\text{V}$ , $V_{GE} = 0\text{V}$ , $f = 1\text{MHz}$                                                                            |                       | 4780 | pF                     |
| $C_{oes}$    |                                                                                                                                             |                       | 330  | pF                     |
| $C_{res}$    |                                                                                                                                             |                       | 117  | pF                     |
| $Q_g$        | $I_C = 50\text{A}$ , $V_{GE} = 15\text{V}$ , $V_{CE} = 0.5 \cdot V_{CES}$                                                                   |                       | 174  | nC                     |
| $Q_{ge}$     |                                                                                                                                             |                       | 33   | nC                     |
| $Q_{gc}$     |                                                                                                                                             |                       | 72   | nC                     |
| $t_{d(on)}$  | Inductive Load, $T_J = 25^\circ\text{C}$<br>$I_C = 50\text{A}$ , $V_{GE} = 15\text{V}$<br>$V_{CE} = 480\text{V}$ , $R_G = 2\Omega$ , Note 2 |                       | 27   | ns                     |
| $t_{ri}$     |                                                                                                                                             |                       | 37   | ns                     |
| $E_{on}$     |                                                                                                                                             |                       | 1.03 | mJ                     |
| $t_{d(off)}$ |                                                                                                                                             |                       | 77   | ns                     |
| $t_{fi}$     |                                                                                                                                             |                       | 55   | ns                     |
| $E_{off}$    |                                                                                                                                             |                       | 0.48 | mJ                     |
| $t_{d(on)}$  | Inductive Load, $T_J = 25^\circ\text{C}$<br>$I_C = 50\text{A}$ , $V_{GE} = 15\text{V}$<br>$V_{CE} = 480\text{V}$ , $R_G = 2\Omega$ , Note 2 |                       | 26   | ns                     |
| $t_{ri}$     |                                                                                                                                             |                       | 36   | ns                     |
| $E_{on}$     |                                                                                                                                             |                       | 1.48 | mJ                     |
| $t_{d(off)}$ |                                                                                                                                             |                       | 120  | ns                     |
| $t_{fi}$     |                                                                                                                                             |                       | 124  | ns                     |
| $E_{off}$    |                                                                                                                                             |                       | 0.93 | mJ                     |
| $R_{thJC}$   |                                                                                                                                             |                       | 0.15 | $0.23^\circ\text{C/W}$ |
| $R_{thCS}$   |                                                                                                                                             |                       |      | $^\circ\text{C/W}$     |

## PLUS247™ (IXGX) Outline



Terminals: 1 - Gate  
2 - Drain (Collector)  
3 - Source (Emitter)  
4 - Drain (Collector)

| Dim.           | Millimeter |       | Inches   |       |
|----------------|------------|-------|----------|-------|
|                | Min.       | Max.  | Min.     | Max.  |
| A              | 4.83       | 5.21  | .190     | .205  |
| A <sub>1</sub> | 2.29       | 2.54  | .090     | .100  |
| A <sub>2</sub> | 1.91       | 2.16  | .075     | .085  |
| b              | 1.14       | 1.40  | .045     | .055  |
| b <sub>1</sub> | 1.91       | 2.13  | .075     | .084  |
| b <sub>2</sub> | 2.92       | 3.12  | .115     | .123  |
| C              | 0.61       | 0.80  | .024     | .031  |
| D              | 20.80      | 21.34 | .819     | .840  |
| E              | 15.75      | 16.13 | .620     | .635  |
| e              | 5.45 BSC   |       | .215 BSC |       |
| L              | 19.81      | 20.32 | .780     | .800  |
| L1             | 3.81       | 4.32  | .150     | .170  |
| Q              | 5.59       | 6.20  | .220     | 0.244 |
| R              | 4.32       | 4.83  | .170     | .190  |

## Reverse Diode (FRED)

| Symbol     | Test Conditions<br>( $T_J = 25^\circ\text{C}$ , Unless Otherwise Specified)                                                            | Characteristic Values |            |                       |
|------------|----------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------------|-----------------------|
|            |                                                                                                                                        | Min.                  | Typ.       | Max.                  |
| $V_F$      | $I_F = 60\text{A}$ , $V_{GE} = 0\text{V}$ , Note 1<br>$T_J = 150^\circ\text{C}$                                                        |                       | 1.6<br>1.4 | 2.0<br>1.8 V          |
| $I_{RM}$   | $I_F = 60\text{A}$ , $V_{GE} = 0\text{V}$ ,<br>$-di_F/dt = 200\text{A}/\mu\text{s}$ , $V_R = 300\text{V}$<br>$T_J = 100^\circ\text{C}$ |                       | 8.3        | A                     |
| $t_{rr}$   |                                                                                                                                        |                       | 140        | ns                    |
| $R_{thJC}$ |                                                                                                                                        |                       |            | $0.3^\circ\text{C/W}$ |







## Notes:






1. Pulse test,  $t \leq 300\mu\text{s}$ , duty cycle,  $d \leq 2\%$ .
2. Switching times & energy losses may increase for higher  $V_{CE}$  (Clamp),  $T_J$  or  $R_G$ .

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.


IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents:

|           |           |           |           |              |              |              |              |              |              |
|-----------|-----------|-----------|-----------|--------------|--------------|--------------|--------------|--------------|--------------|
| 4,835,592 | 4,931,844 | 5,049,961 | 5,237,481 | 6,162,665    | 6,404,065 B1 | 6,683,344    | 6,727,585    | 7,005,734 B2 | 7,157,338 B2 |
| 4,850,072 | 5,017,508 | 5,063,307 | 5,381,025 | 6,259,123 B1 | 6,534,343    | 6,710,405 B2 | 6,759,692    | 7,063,975 B2 |              |
| 4,881,106 | 5,034,796 | 5,187,117 | 5,486,715 | 6,306,728 B1 | 6,583,505    | 6,710,463    | 6,771,478 B2 | 7,071,537    |              |

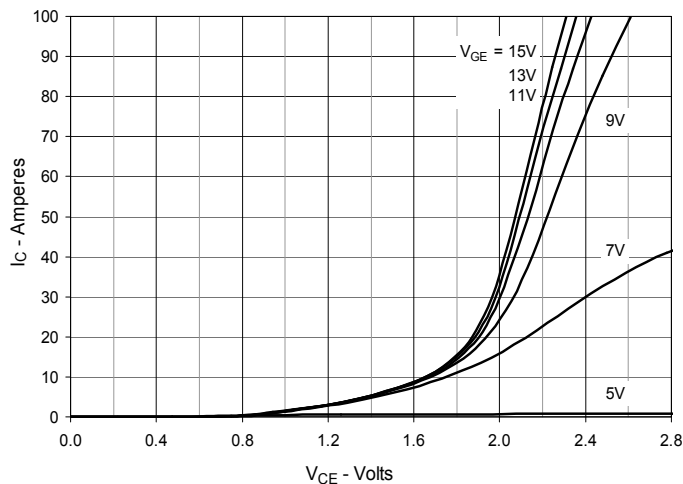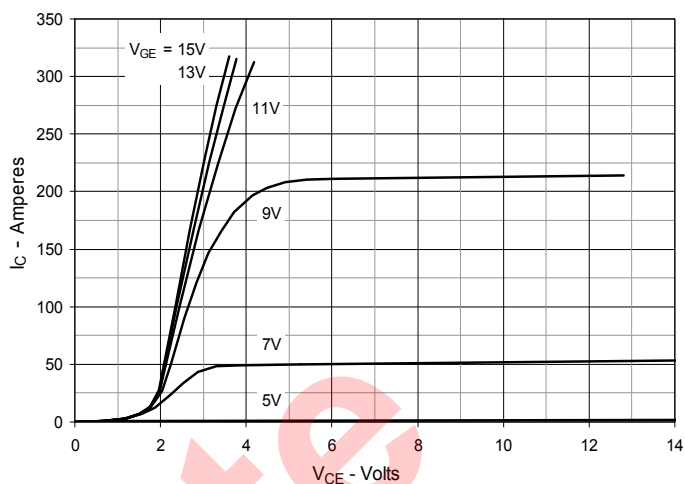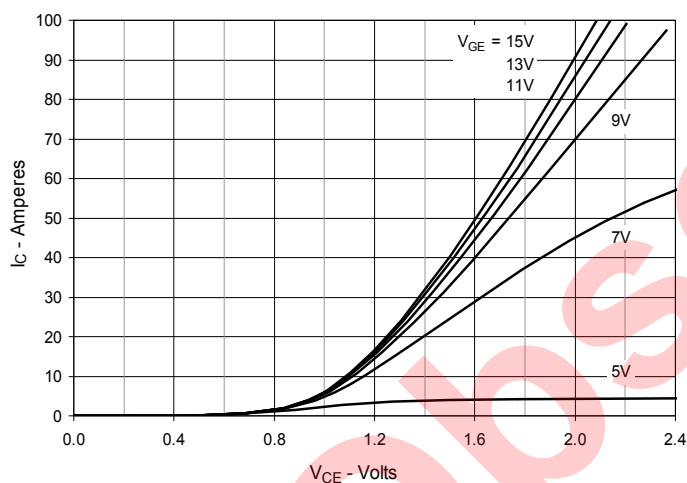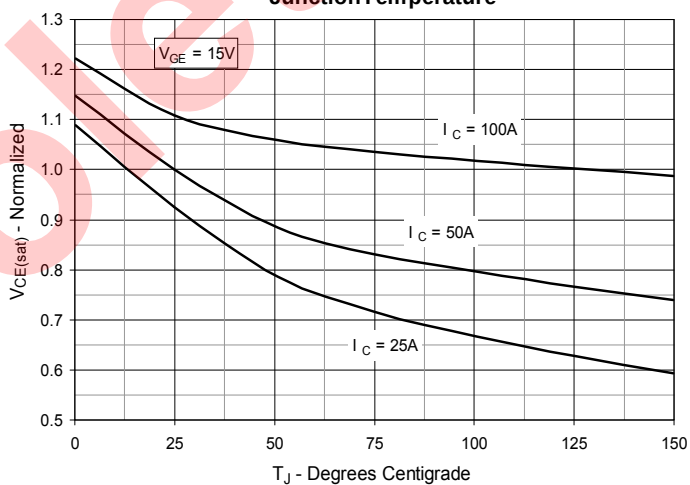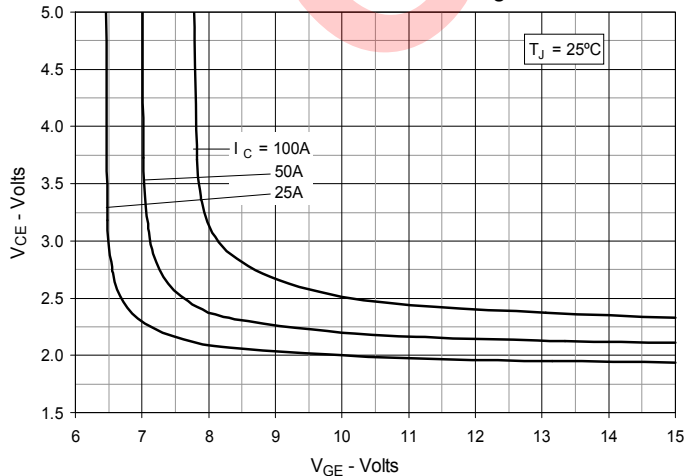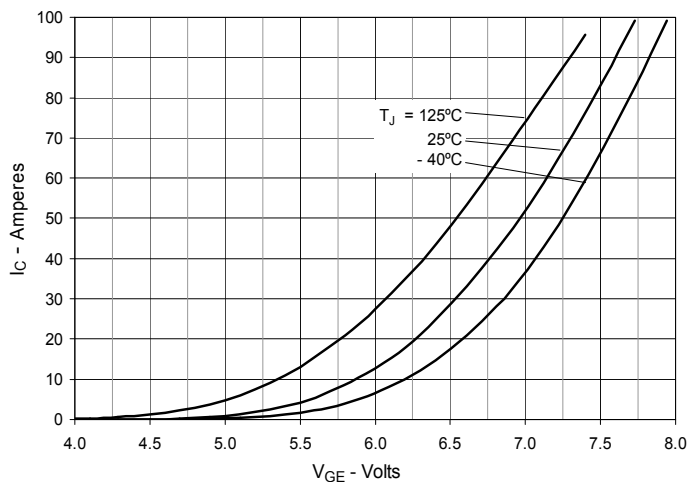
**Fig. 1. Output Characteristics @  $T_J = 25^\circ\text{C}$** 

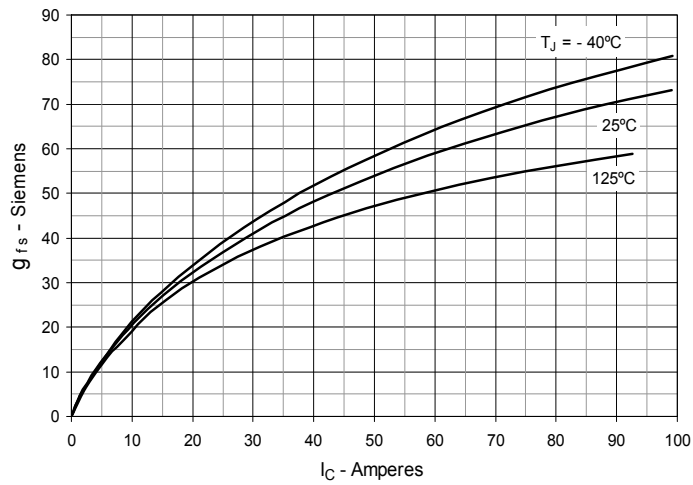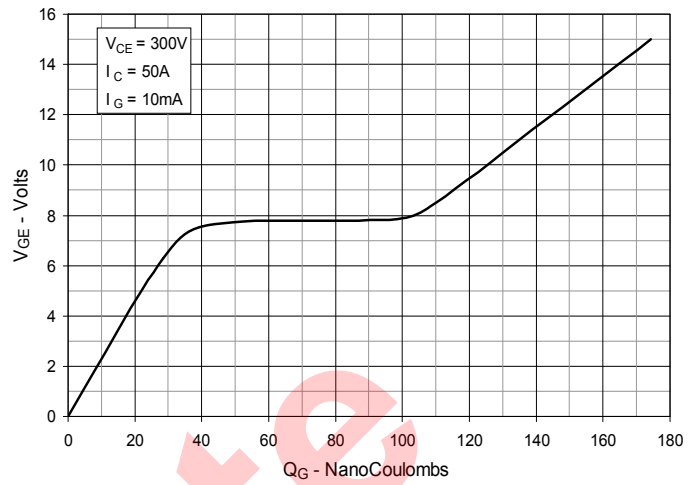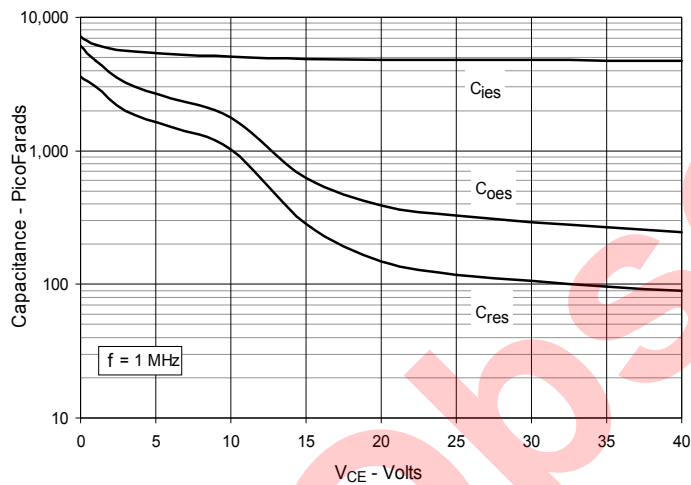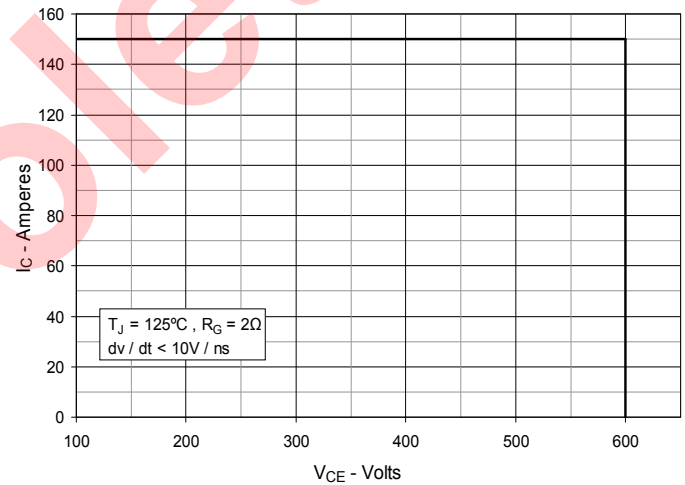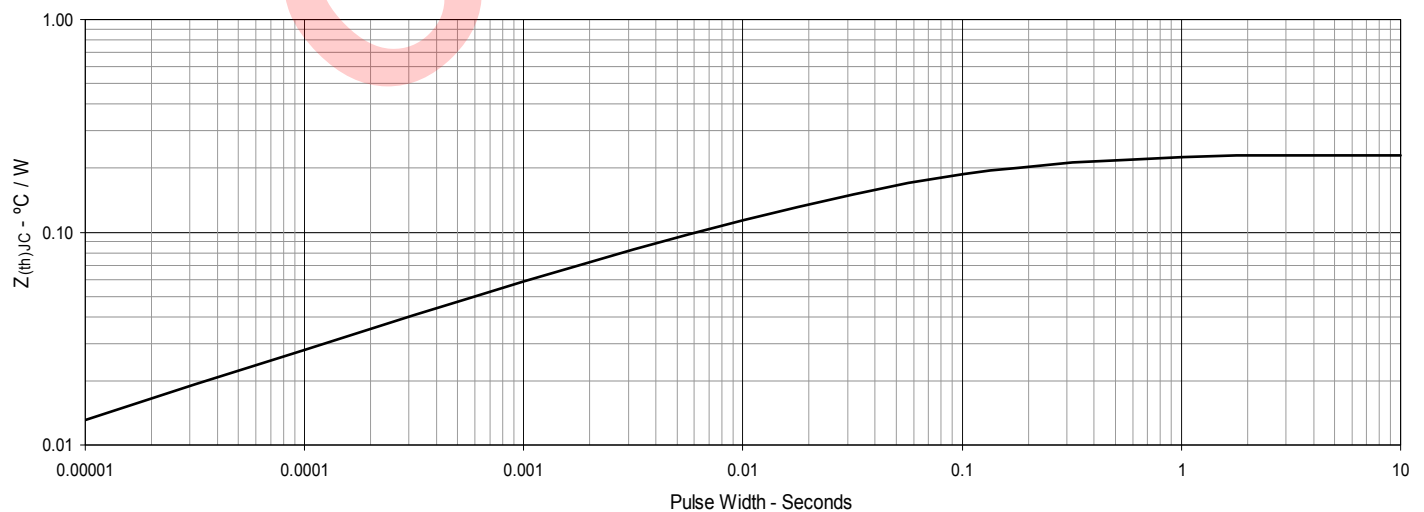**Fig. 2. Extended Output Characteristics @  $T_J = 25^\circ\text{C}$** 

**Fig. 3. Output Characteristics @  $T_J = 125^\circ\text{C}$** 

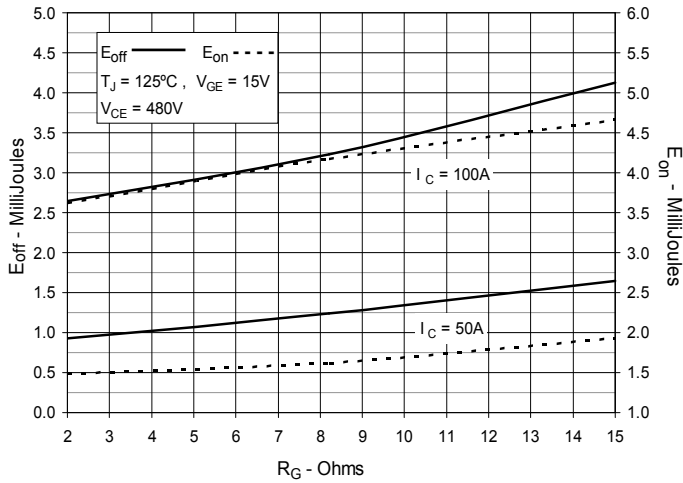**Fig. 4. Dependence of  $V_{CE(sat)}$  on Junction Temperature**

**Fig. 5. Collector-to-Emitter Voltage vs. Gate-to-Emitter Voltage**

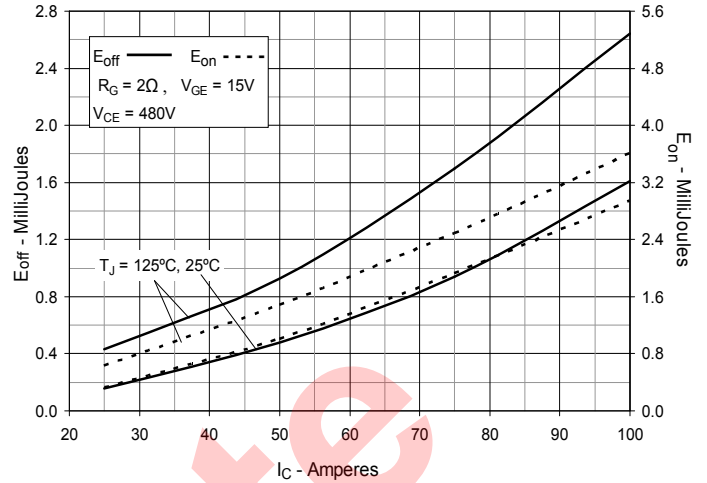**Fig. 6. Input Admittance**


**Fig. 7. Transconductance**

**Fig. 8. Gate Charge**

**Fig. 9. Capacitance**

**Fig. 10. Reverse-Bias Safe Operating Area**

**Fig. 11. Maximum Transient Thermal Impedance**


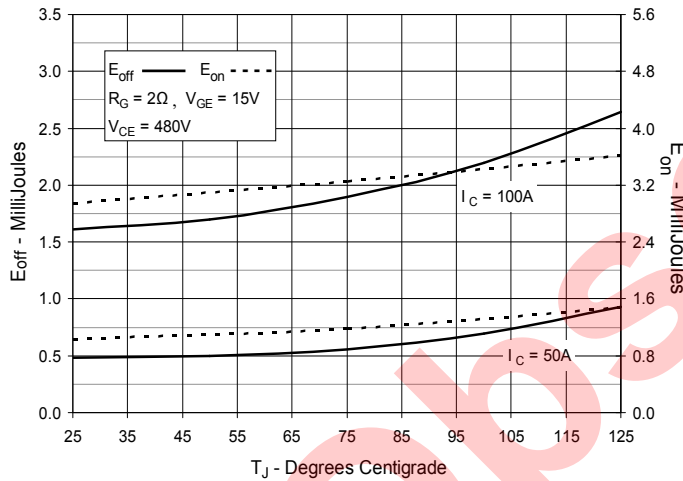
**Fig. 12. Inductive Switching  
Energy Loss vs. Gate Resistance**




**Fig. 13. Inductive Switching  
Energy Loss vs. Collector Current**




**Fig. 14. Inductive Switching  
Energy Loss vs. Junction Temperature**




**Fig. 15. Inductive Turn-off  
Switching Times vs. Gate Resistance**

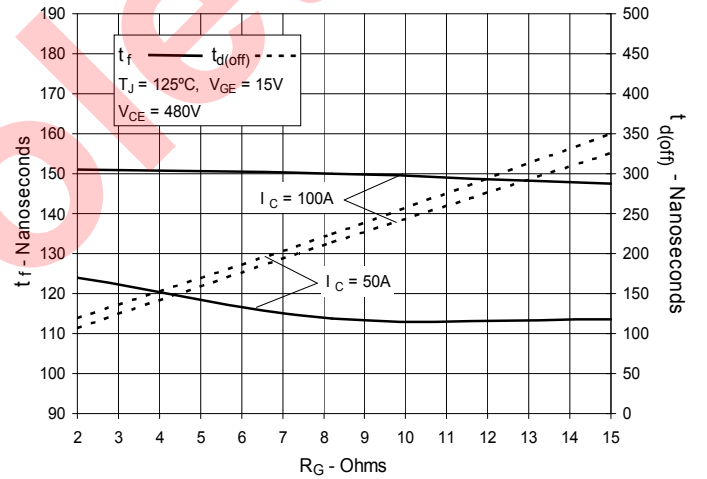


**Fig. 16. Inductive Turn-off  
Switching Times vs. Collector Current**

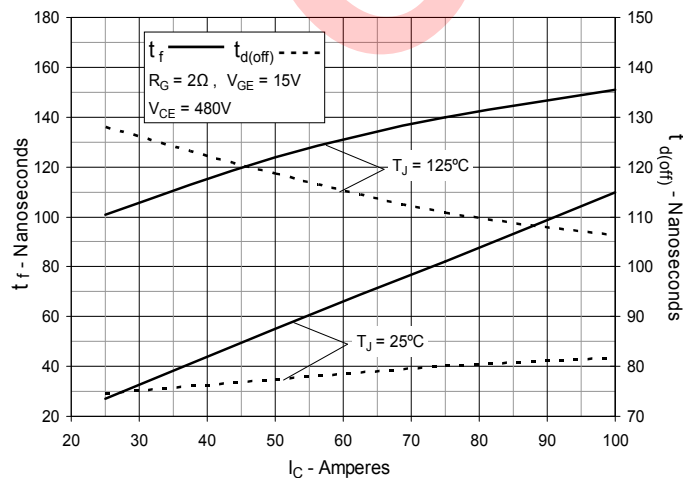


**Fig. 17. Inductive Turn-off  
Switching Times vs. Junction Temperature**

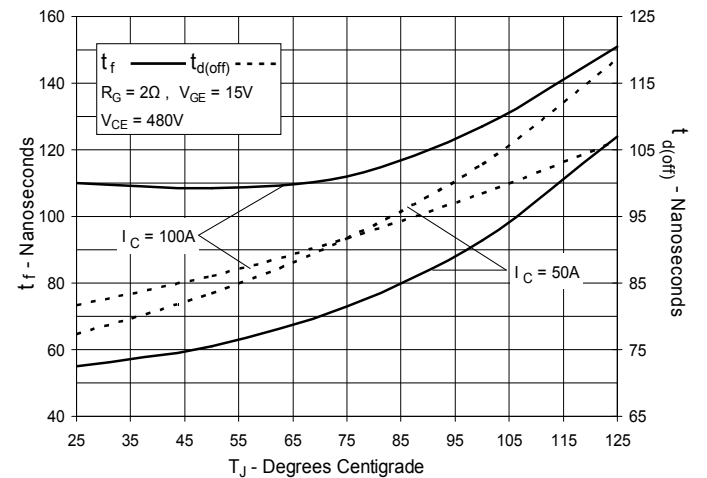


**Fig. 18. Inductive Turn-on  
Switching Times vs. Gate Resistance**

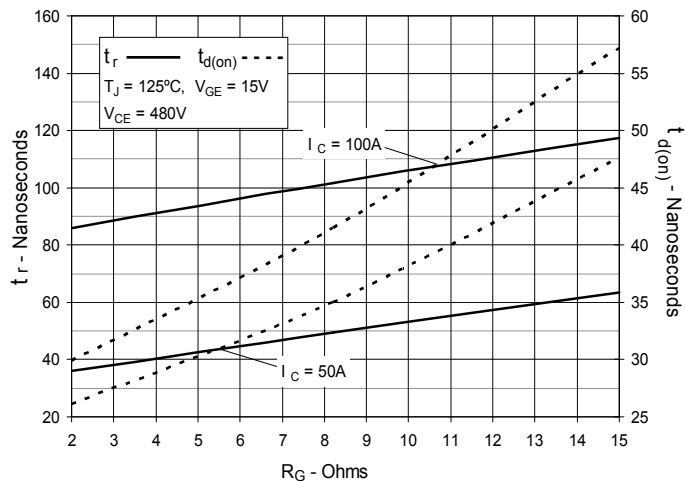

**Fig. 19. Inductive Turn-on  
Switching Times vs. Collector Current**

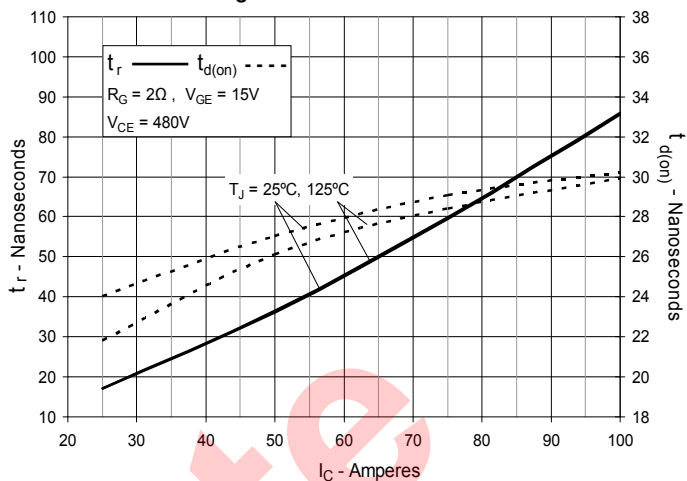

**Fig. 20. Inductive Turn-on  
Switching Times vs. Junction Temperature**

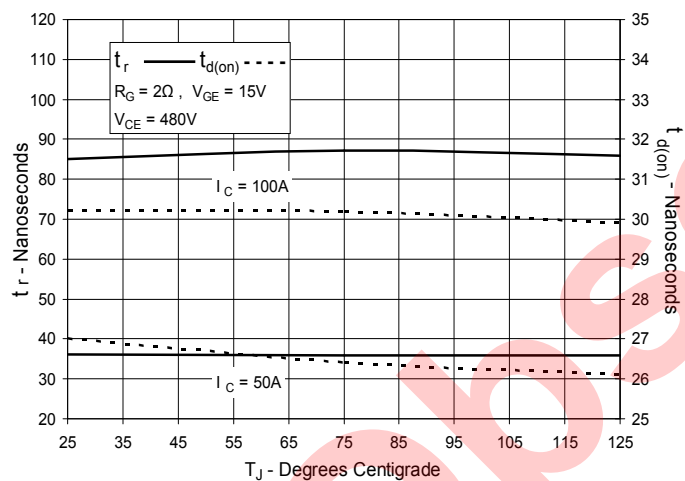

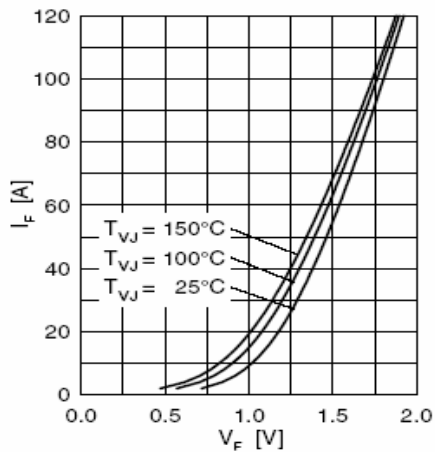


Fig. 1 Forward current  $I_F$  vs.  $V_F$

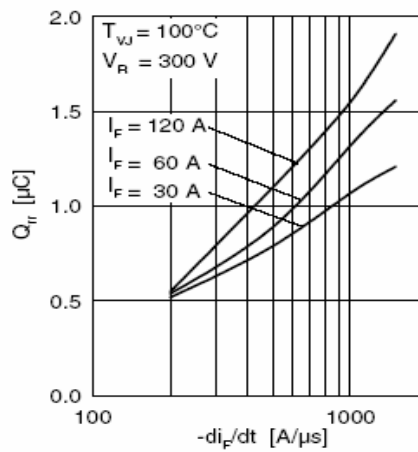


Fig. 2 Typ. reverse recovery charge  $Q_{rr}$

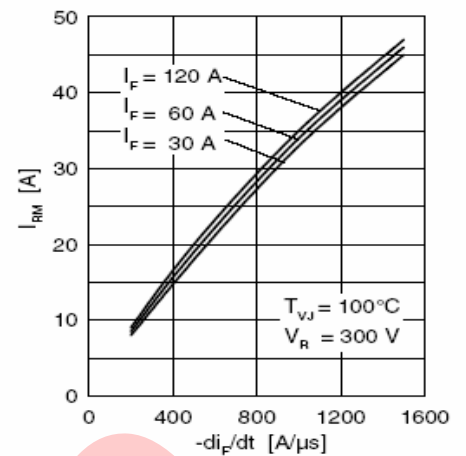


Fig. 3 Typ. peak reverse current  $I_{RM}$

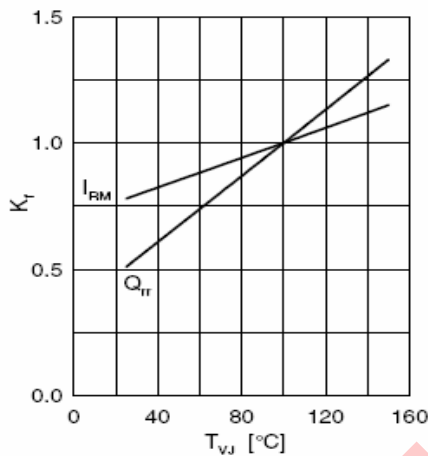


Fig. 4 Typ. dynamic parameters  $Q_{rr}$ ,  $I_{RM}$

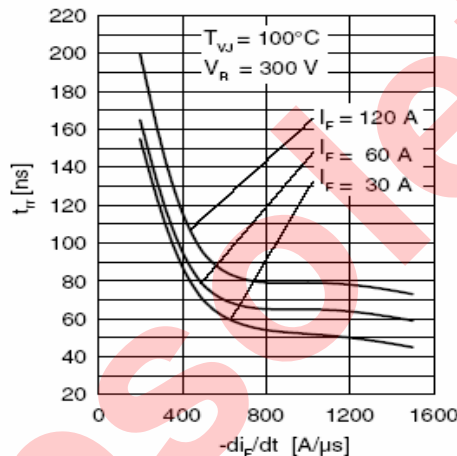


Fig. 5 Typ. recovery time  $t_{rr}$

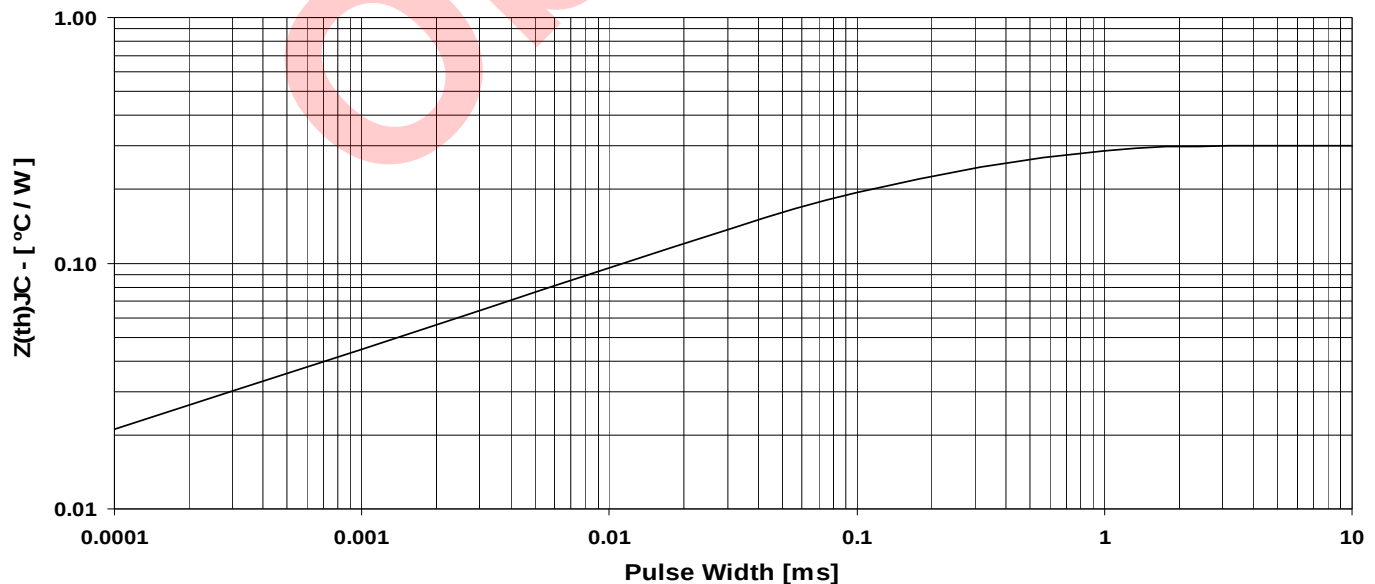


Fig. 26 Maximum transient thermal impedance junction to case (for diode)

Obsolete



---

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).