


IGBT

Combi Pack

IXGA/IXGP12N100U1
IXGA/IXGP12N100AU1




Preliminary Data Sheet


V_{CES}	I_{C25}	$V_{CE(sat)}$
1000 V	24 A	3.5 V
1000 V	24 A	4.0 V

Symbol	Test Conditions	Maximum Ratings	
V_{CES}	$T_J = 25^\circ\text{C}$ to 150°C	1000	V
V_{CGR}	$T_J = 25^\circ\text{C}$ to 150°C ; $R_{GE} = 1\text{ M}\Omega$	1000	V
V_{GES}	Continuous	± 20	V
V_{GEM}	Transient	± 30	V
I_{C25}	$T_C = 25^\circ\text{C}$	24	A
I_{C90}	$T_C = 90^\circ\text{C}$	12	A
I_{CM}	$T_C = 25^\circ\text{C}$, 1 ms	48	A
SSOA (RBSOA)	$V_{GE} = 15\text{ V}$, $T_{VJ} = 125^\circ\text{C}$, $R_G = 150\ \Omega$ Clamped inductive load, $L = 300\ \mu\text{H}$	$I_{CM} = 24$ @ $0.8 V_{CES}$	A
P_C	$T_C = 25^\circ\text{C}$	100	W
T_J		$-55 \dots +150$	$^\circ\text{C}$
T_{JM}		150	$^\circ\text{C}$
T_{stg}		$-55 \dots +150$	$^\circ\text{C}$
M_d	Mounting torque with screw M3 Mounting torque with screw M3.5	0.45/4 0.55/5	Nm/lb.in.
Weight		4	g
Maximum lead temperature for soldering 1.6 mm (0.062 in.) from case for 10 s		300	$^\circ\text{C}$

TO-220AB(IXGP)



TO-263 AA (IXGA)



Features

- International standard packages JEDEC TO-220AB and TO-263AA
- IGBT with antiparallel FRED in one package
- Second generation HDMOS™ process
- Low $V_{CE(sat)}$
 - for minimum on-state conduction losses
- MOS Gate turn-on
 - drive simplicity
- Fast Recovery Exptaxial Diode (FRED)
 - soft recovery with low I_{RM}

Applications

- AC motor speed control
- DC servo and robot drives
- DC choppers
- Uninterruptible power supplies (UPS)
- Switch-mode and resonant-mode power supplies

Advantages


- Easy to mount with one screw
- Space savings (two devices in one package)
- Reduces assembly time and cost
- High power density

Symbol	Test Conditions ($T_J = 25^\circ\text{C}$, unless otherwise specified)	Characteristic Values		
		Min.	Typ.	Max.
BV_{CES}	$I_C = 3\text{ mA}$, $V_{GE} = 0\text{ V}$	1000		V
$V_{GE(th)}$	$I_C = 250\ \mu\text{A}$, $V_{GE} = V_{GE}$	2.5		V
I_{CES}	$V_{CE} = 0.8$, V_{CES} $V_{GE} = 0\text{ V}$	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$		300 μA 3 mA
I_{GES}	$V_{CE} = 0\text{ V}$, $V_{GE} = \pm 20\text{ V}$			$\pm 100\text{ nA}$
$V_{CE(sat)}$	$I_C = I_{CE90}$, $V_{GE} = 15$	12N100 12N100A		3.5 V 4.0 V


Symbol	Test Conditions	Characteristic Values		
		Min.	Typ.	Max.
g_{fs}	$I_C = I_{C90}; V_{CE} = 10 V$, Pulse test, $t \leq 300 \mu s$, duty cycle $\leq 2 \%$	6	10	S
Q_g	$I_C = I_{C90}; V_{GE} = 15 V, V_{CE} = 0.5 V_{CES}$		65	90 nC
Q_{ge}			8	20 nC
Q_{gc}			24	45 nC
$t_{d(on)}$	Inductive load, $T_J = 25^\circ C$ $I_C = I_{C90}, V_{GE} = 15 V, L = 300 \mu H$ $V_{CE} = 800 V, R_G = R_{off} = 120 \Omega$ Remarks: Switching times may increase for $V_{CE} (Clamp) > 0.8 V_{CES}$, higher T_J or increased R_G		100	ns
t_{ri}			200	ns
$t_{d(off)}$			850	1000 ns
t_{fi}		12N100A	500	700 ns
t_{fi}		12N100	800	1000 ns
E_{off}		12N100A	4	6 mJ
$t_{d(on)}$	Inductive load, $T_J = 125^\circ C$ $I_C = I_{C90}, V_{GE} = 15 V, L = 300 \mu H$ $V_{CE} = 800 V, R_G = R_{off} = 120 \Omega$ Remarks: Switching times may increase for $V_{CE} (Clamp) > 0.8 V_{CES}$, higher T_J or increased R_G		100	ns
t_{ri}			200	ns
E_{on}			1.1	mJ
$t_{d(off)}$		12N100A	900	ns
t_{fi}		12N100	950	ns
E_{off}		12N100A	8	mJ
E_{off}		12N100	10	mJ
R_{thJC}			0.25	1.25 K/W
R_{thCK}				K/W

Reverse Diode (FRED)		Characteristic Values		
(T _J = 25°C, unless otherwise specified)		Min.	Typ.	Max.
Symbol	Test Conditions			
V_F	$I_F = 8A, V_{GE} = 0 V$, Pulse test, $t \leq 300 \mu s$, duty cycle $d \leq 2 \%$			2.75 V
I_{RM}	$I_F = I_{C90}, V_{GE} = 0 V, -di_F/dt = 100 A/\mu s$		6.5	A
t_{rr}	$V_R = 100 V, T_J = 125^\circ C$		140	ns
t_{rr}	$I_F = 1 A, -di/dt = 50 A/\mu s, V_R = 30 V, T_J = 25^\circ C$		50	60 ns
R_{thJC}				2.5 K/W

Min. Recommended Footprint

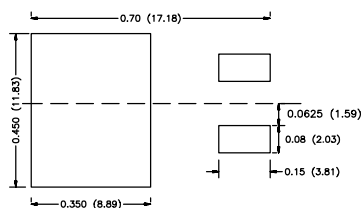


TO-220 AB (IXGP) Outline



Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	12.70	13.97	0.500	0.550
B	14.73	16.00	0.580	0.630
C	9.91	10.66	0.390	0.420
D	3.54	4.08	0.139	0.161
E	5.85	6.85	0.230	0.270
F	2.54	3.18	0.100	0.125
G	1.15	1.65	0.045	0.065
H	2.79	5.84	0.110	0.230
J	0.64	1.01	0.025	0.040
K	2.54	BSC	0.100	BSC
M	4.32	4.82	0.170	0.190
N	1.14	1.39	0.045	0.055
Q	0.35	0.56	0.014	0.022
R	2.29	2.79	0.090	0.110

TO-263 AA (IXGA) Outline



Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.06	4.83	.160	.190
A1	2.03	2.79	.080	.110
b	0.51	0.99	.020	.039
b2	1.14	1.40	.045	.055
c	0.46	0.74	.018	.029
c2	1.14	1.40	.045	.055
D	8.64	9.65	.340	.380
D1	7.11	8.13	.280	.320
E	9.65	10.29	.380	.405
E1	6.86	8.13	.270	.320
e	2.54	BSC	.100	BSC
L	14.61	15.88	.575	.625
L1	2.29	2.79	.090	.110
L2	1.02	1.40	.040	.055
L3	1.27	1.78	.050	.070
L4	0	0.38	0	.015
R	0.46	0.74	.018	.029

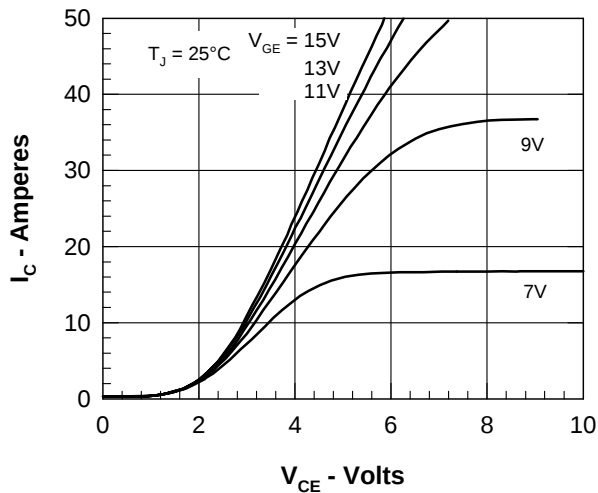


Figure 1. Saturation Voltage Characteristics

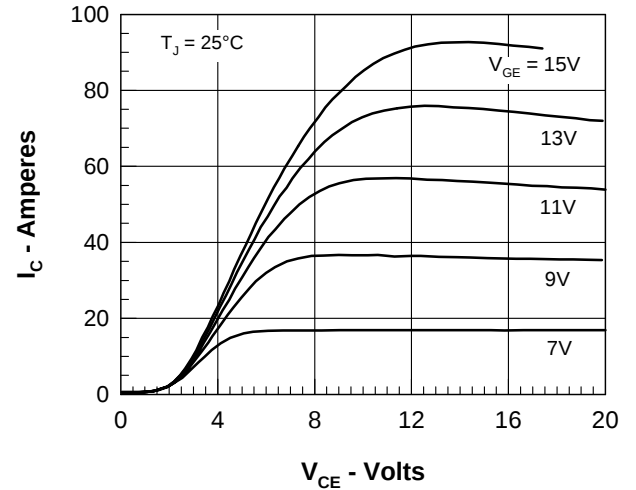


Figure 2. Extended Output Characteristics

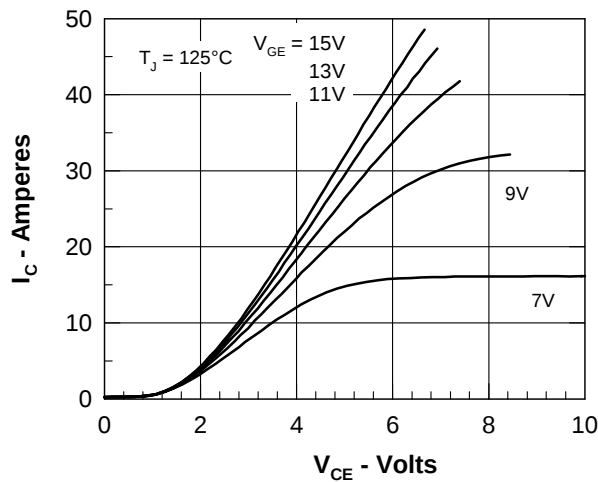


Figure 3. Saturation Voltage Characteristics

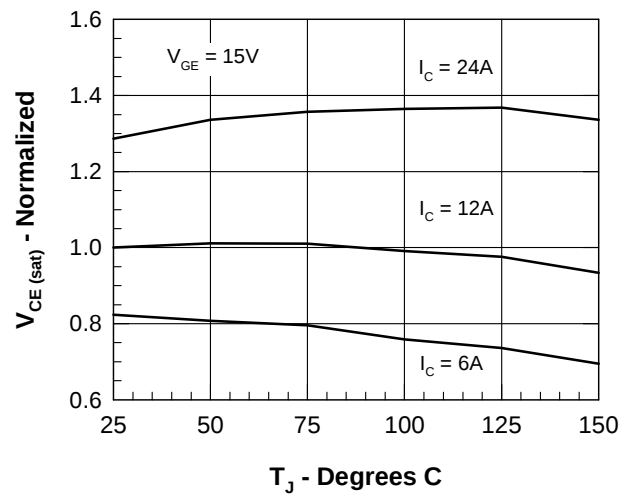
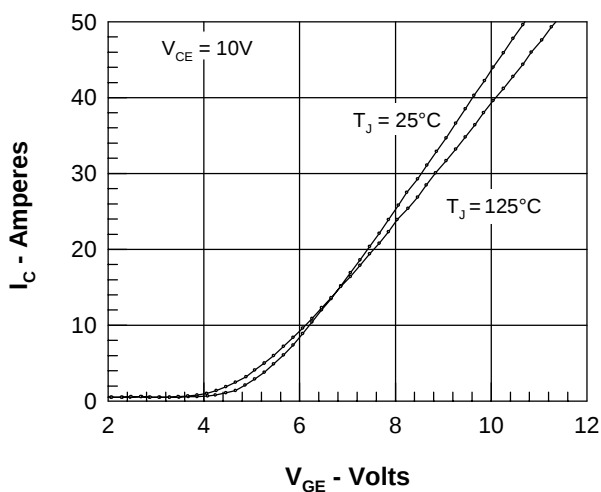

Figure 4. Temperature Dependence of $V_{CE(sat)}$


Figure 5. Admittance Curves

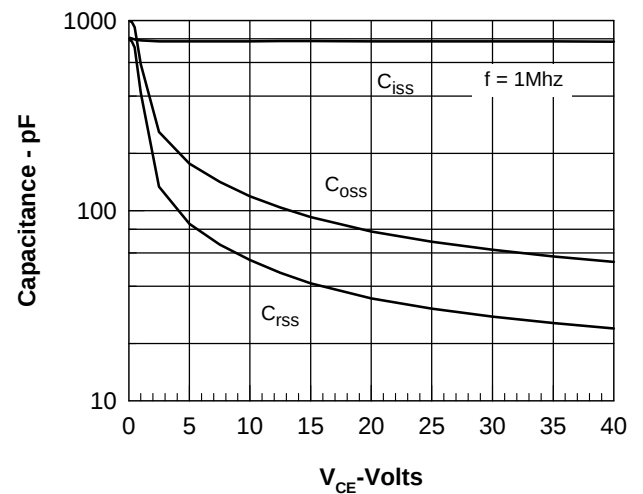


Figure 6. Capacitance Curves

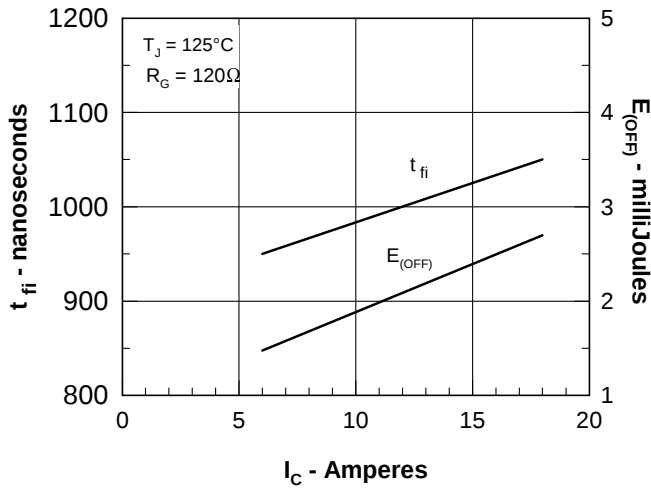


Figure 7. Dependence of t_{fi} and E_{OFF} on I_C .

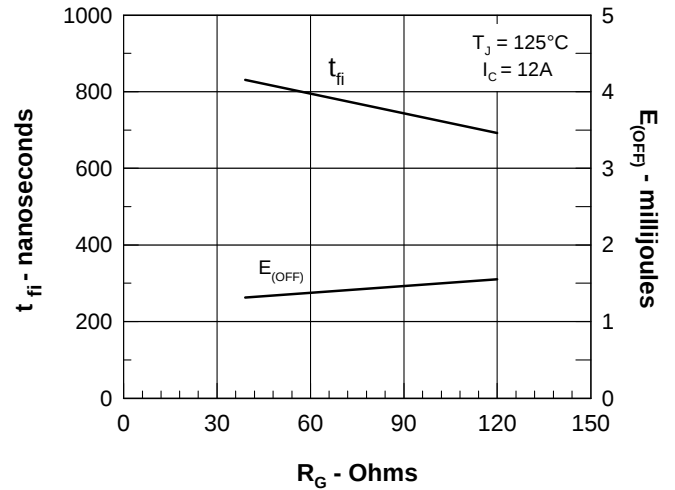


Figure 8. Dependence of t_{fi} and E_{OFF} on R_G .

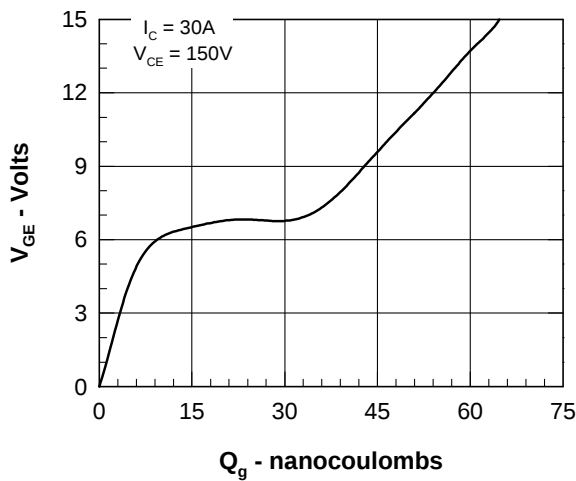


Figure 9. Gate Charge

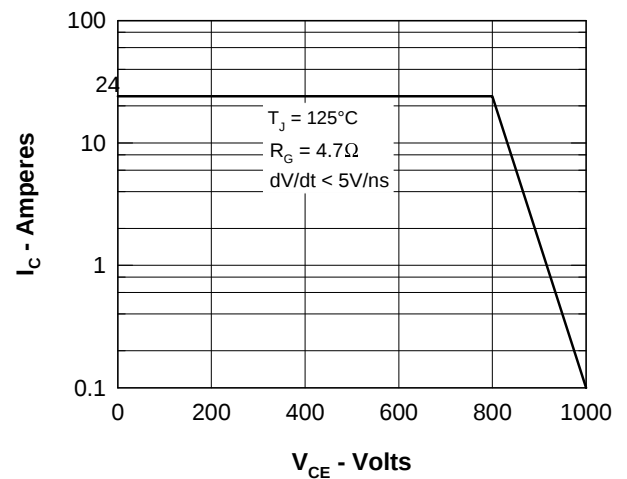


Figure 10. Turn-off Safe Operating Area

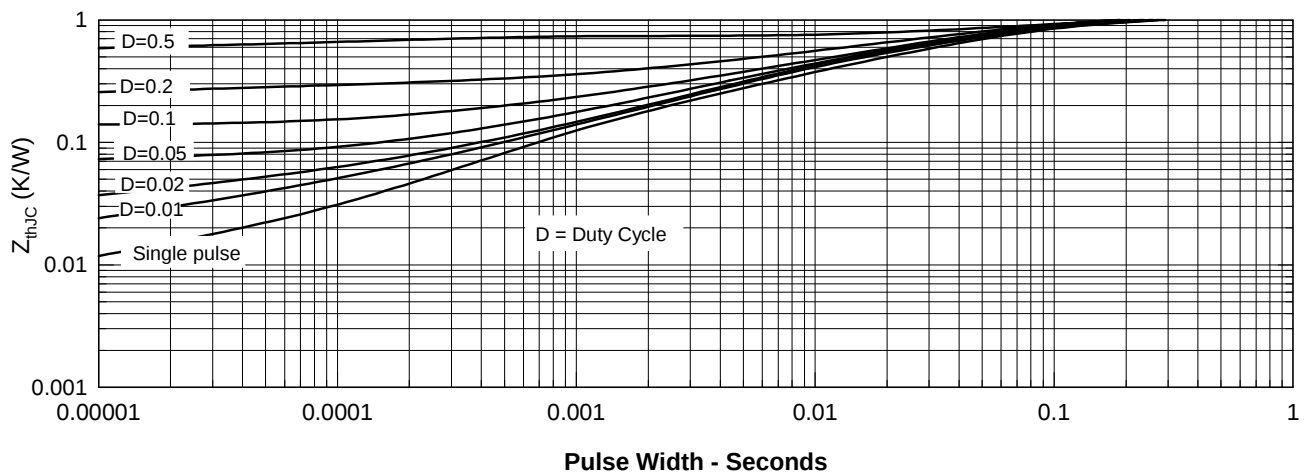


Figure 11. Transient Thermal Resistance



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.