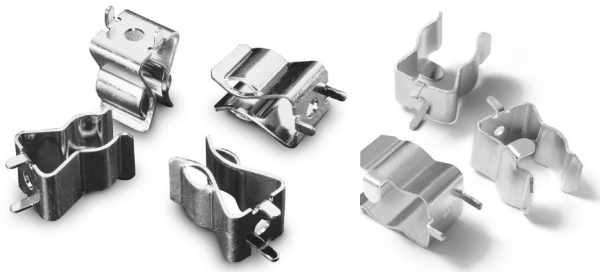


105/106/125 Series

Circuit Board Mount Clips for 10mm (13/32") Diameter Fuses

**Traditional Type: 105/125 Series****Low Profile Type: 106 Series**

Product Characteristics

| | 105 Series | 125 Series | 106 Series |
|----------------------|------------------------------|------------|------------|
| Compatible Fuse Size | 10mm (13/32") Diameter Fuses | | |
| Current Levels | 15A max | 30A max | 15A max |

Agency Approval

| Agency | Agency File Number | | |
|--------|--------------------|------------|------------|
| | 105 Series | 125 Series | 106 Series |
| cUL US | E14721 | | N/A |

Ordering Information

| Ordering No. | Catalog No. | Clip Material* | Plating | Style | Packaging |
|--------------|-------------|------------------|------------|-------|-------------|
| 01050003H | 105 003 | Spring Brass | Tin-plated | Ear | Bulk/100pcs |
| 01250003H | 125 003 | Beryllium Copper | Tin-plated | Ear | Bulk/100pcs |
| 01060001Z | 106 001 | Phosphor Bronze | Tin-plated | Ear | Bulk/100pcs |

"H" = std. package 100 pcs per pack
 "Z" = for bulk package

Additional Information



Resources
105 Series



Accessories
105 Series



Samples
105 Series



Resources
106 Series



Accessories
106 Series



Samples
106 Series



Resources
125 Series




Accessories
125 Series




Samples
125 Series

Product Dimensions mm (inches)

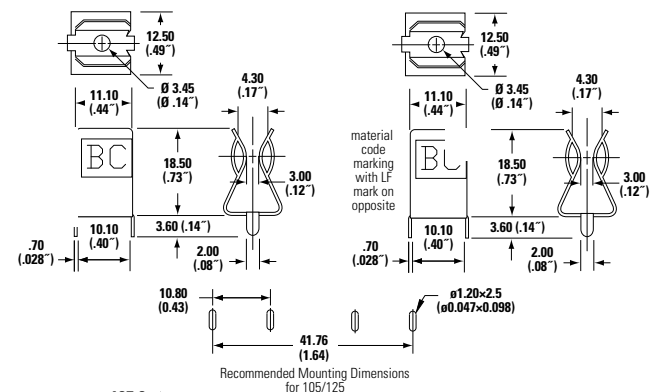


105 003
Device Dimensions

125 003
Device Dimensions



106 001
Device Dimensions



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: www.littelfuse.com/disclaimer-electronics.