



HiPerFET™ Power MOSFET

N-Channel Enhancement Mode

Avalanche Rated, High dv/dt, Low t_{rr}

	V_{DSS}	I_{D25}	$R_{DS(on)}$	t_{rr}
IXFK/FN 36N60	600V	36A	0.18Ω	250ns
IXFK/FN 32N60	600V	32A	0.25Ω	250ns

Symbol	Test Conditions	Maximum Ratings		
		IXFK	IXFN	
V_{DSS}	$T_J = 25^\circ\text{C}$ to 150°C	600	600	V
V_{DGR}	$T_J = 25^\circ\text{C}$ to 150°C ; $R_{GS} = 1\text{ M}\Omega$	600	600	V
V_{GS}	Continuous	±20	±20	V
V_{GSM}	Transient	±30	±30	V
I_{D25}	$T_C = 25^\circ\text{C}$, Chip capability	32N60	32	A
		36N60	36	A
I_{DM}	$T_C = 25^\circ\text{C}$, pulse width limited by T_{JM}	32N60	128	A
		36N60	144	A
I_{AR}	$T_C = 25^\circ\text{C}$	20	20	A
E_{AR}	$T_C = 25^\circ\text{C}$	30	30	mJ
dv/dt	$I_S \leq I_{DM}$, $di/dt \leq 100\text{ A}/\mu\text{s}$, $V_{DD} \leq V_{DSS}$ $T_J \leq 150^\circ\text{C}$, $R_G = 2\text{ }\Omega$	5	5	V/ns
P_D	$T_C = 25^\circ\text{C}$	500	520	W
T_J		-55 ...	+150	$^\circ\text{C}$
T_{JM}			150	$^\circ\text{C}$
T_{stg}		-55 ...	+150	$^\circ\text{C}$
T_L	1.6 mm (0.063 in) from case for 10 s	300	-	$^\circ\text{C}$
V_{ISOL}	50/60 Hz, RMSt = 1 min $I_{ISOL} \leq 1\text{ mA}$ at 1 s	-	2500	V~
		-	3000	V~
M_d	Mounting torque	0.9/6	1.5/13	Nm/lb.in.
	Terminal connection torque	-	1.5/13	Nm/lb.in.
Weight		10	30	g

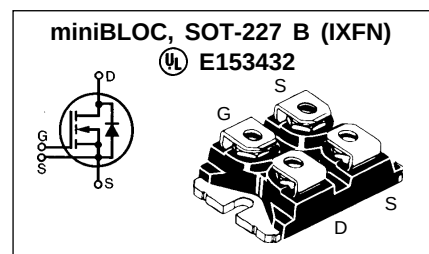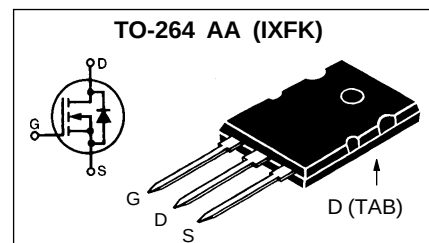

G = Gate D = Drain
S = Source TAB = Drain
Either Source terminal at miniBLOC
can be used as Main or Kelvin Source

Features

- International standard packages
- JEDEC TO-264 AA, epoxy meet UL 94 V-0, flammability classification
- miniBLOC with Aluminium nitride isolation
- Low $R_{DS(on)}$ HDMOS™ process
- Rugged polysilicon gate cell structure
- Unclamped Inductive Switching (UIS) rated
- Low package inductance
- Fast intrinsic Rectifier

Applications

- DC-DC converters
- Synchronous rectification
- Battery chargers
- Switched-mode and resonant-mode power supplies
- DC choppers
- Temperature and lighting controls
- Low voltage relays

Advantages

- Easy to mount
- Space savings
- High power density


Symbol	Test Conditions	Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified)		
		Min.	Typ.	Max.
V_{DSS}	$V_{GS} = 0\text{ V}$, $I_D = 1\text{ mA}$	600		V
$V_{GH(th)}$	$V_{DS} = V_{GS}$, $I_D = 8\text{ mA}$	2		4.5 V
I_{GSS}	$V_{GS} = \pm 20\text{ V}$, $V_{DS} = 0$			±200 nA
I_{DSS}	$V_{DS} = 0.8 V_{DSS}$			400 μA
	$V_{GS} = 0\text{ V}$, $T_J = 125^\circ\text{C}$			2 mA
$R_{DS(on)}$	$V_{GS} = 10\text{ V}$, $I_D = 0.5 I_{D25}$	36N60		0.18 Ω
	Pulse test, $t \leq 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$	32N60		0.25 Ω

Symbol	Test Conditions	Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified)		
		min.	typ.	max.
g_{fs}	$V_{DS} = 10\text{ V}$; $I_D = 0.5 I_{D25}$, pulse test		36	S
C_{iss}	$V_{GS} = 0\text{ V}$, $V_{DS} = 25\text{ V}$, $f = 1\text{ MHz}$		9000	pF
C_{oss}			840	pF
C_{rss}			280	pF
$t_{d(on)}$	$V_{GS} = 10\text{ V}$, $V_{DS} = 0.5 V_{DSS}$, $I_D = 0.5 I_{D25}$ $R_G = 1\ \Omega$ (External),		30	ns
t_r			45	ns
$t_{d(off)}$			100	ns
t_f			60	ns
$Q_{g(on)}$	$V_{GS} = 10\text{ V}$, $V_{DS} = 0.5 V_{DSS}$, $I_D = 0.5 I_{D25}$		325	nC
Q_{gs}			60	nC
Q_{gd}			120	nC
R_{thJC}	TO-264 AA		0.25	K/W
R_{thCK}	TO-264 AA	0.15		K/W
R_{thJC}	miniBLOC, SOT-227 B		0.24	K/W
R_{thCK}	miniBLOC, SOT-227 B	0.05		K/W

Source-Drain Diode


Symbol	Test Conditions	Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified)		
		Min.	Typ.	Max.
I_S	$V_{GS} = 0$	36N60		36 A
I_S	$V_{GS} = 0$	32N60		32 A
I_{SM}	Repetitive; pulse width limited by T_{JM}	36N60		144 A
		32N60		128 A
V_{SD}	$I_F = I_S$ A, $V_{GS} = 0\text{ V}$, Pulse test, $t \leq 300\ \mu\text{s}$, duty cycle $d \leq 2\%$			1.5 V
t_{rr}	$I_F = I_S$, $-di/dt = 100\text{ A}/\mu\text{s}$, $V_R = 100\text{ V}$	20	250	ns
I_{RM}				A

TO-264 AA Outline



Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.82	5.13	.190	.202
A1	2.54	2.89	.100	.114
A2	2.00	2.10	.079	.083
b	1.12	1.42	.044	.056
b1	2.39	2.69	.094	.106
b2	2.90	3.09	.114	.122
c	0.53	0.83	.021	.033
D	25.91	26.16	1.020	1.030
E	19.81	19.96	.780	.786
e	5.46 BSC		.215 BSC	
J	0.00	0.25	.000	.010
K	0.00	0.25	.000	.010
L	20.32	20.83	.800	.820
L1	2.29	2.59	.090	.102
P	3.17	3.66	.125	.144
Q	6.07	6.27	.239	.247
Q1	8.38	8.69	.330	.342
R	3.81	4.32	.150	.170
R1	1.78	2.29	.070	.090
S	6.04	6.30	.238	.248
T	1.57	1.83	.062	.072

miniBLOC, SOT-227 B

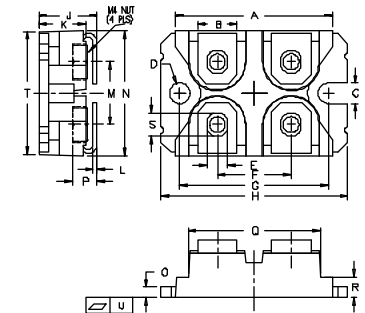

M4 screws (4x) supplied

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	38.00	38.23	1.496	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.76	0.84	0.030	0.033
M	12.60	12.85	0.496	0.506
N	25.15	25.42	0.990	1.001
O	1.98	2.13	0.078	0.084
P	4.95	5.97	0.195	0.235
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.174
S	4.72	4.85	0.186	0.191
T	24.59	25.07	0.968	0.987
U	-0.05	0.1	-0.002	0.004

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents:

4,835,592	4,881,106	5,017,508	5,049,961	5,187,117	5,486,715
4,850,072	4,931,844	5,034,796	5,063,307	5,237,481	5,381,025

Fig.1. Output Characteristics

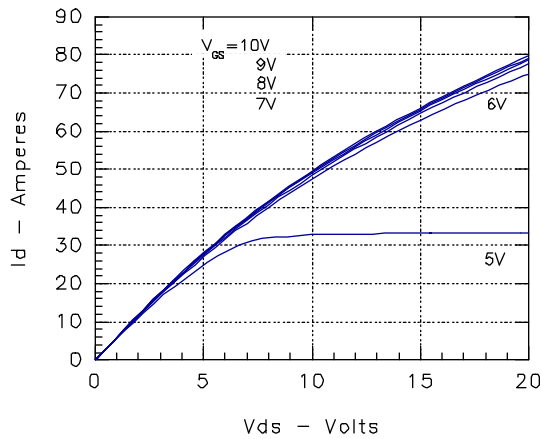


Fig. 2. Input Admittance

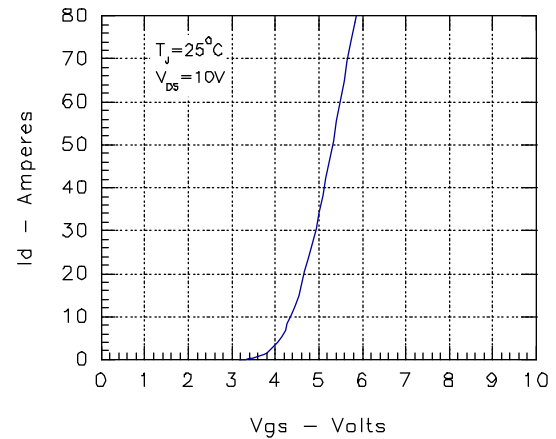


Fig. 3. Rds(on) vs. Drain Current

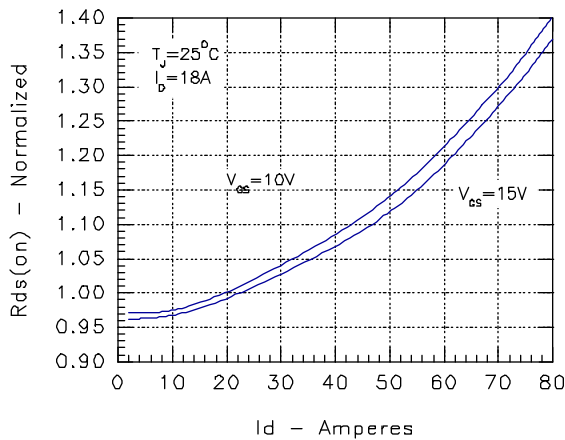


Fig. 4. Temperature Dependence of Drain to Source Resistance

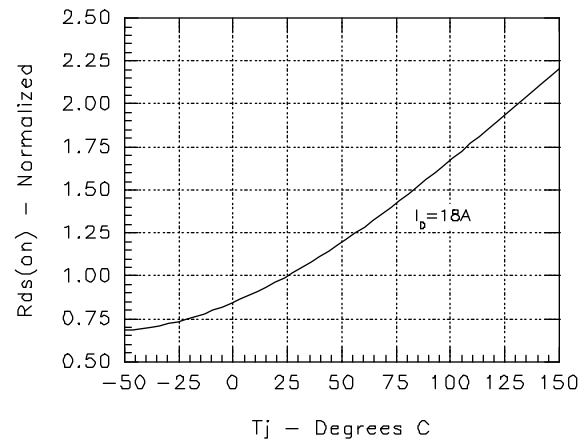


Fig. 5. Drain Current vs. Case Temperature

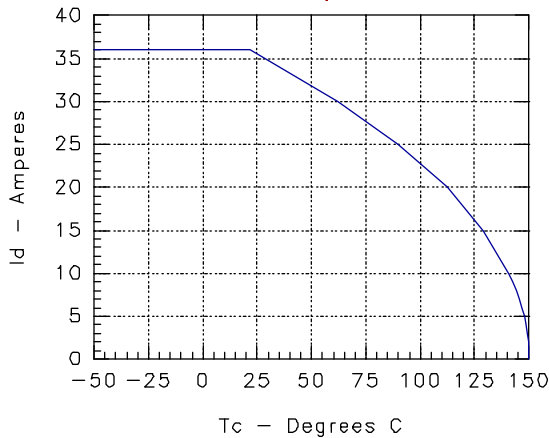


Fig. 6. Temperature Dependence of Breakdown Voltage and Threshold Voltage

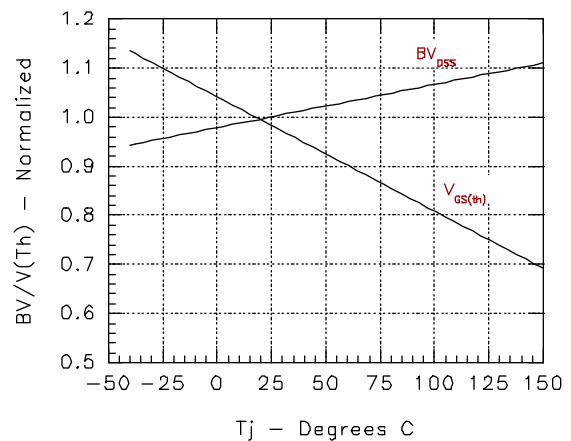


Fig. 7. Gate Charge

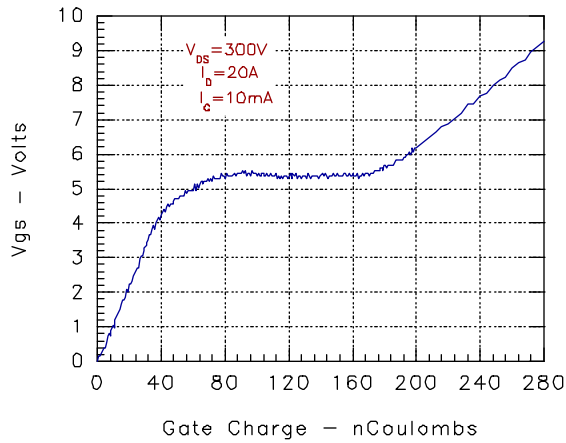


Fig. 8. Capacitance Curves

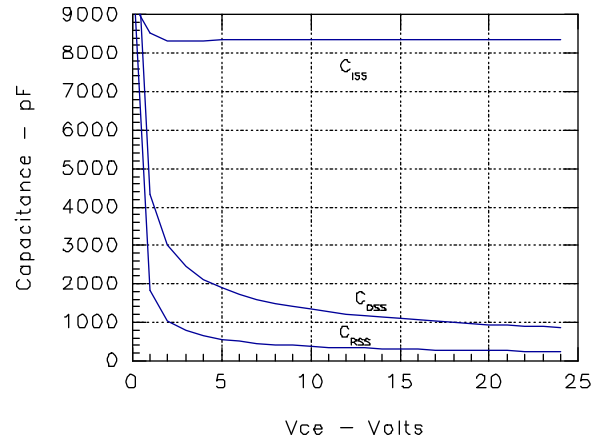


Fig. 9. Source Current vs. Source to Drain Voltage


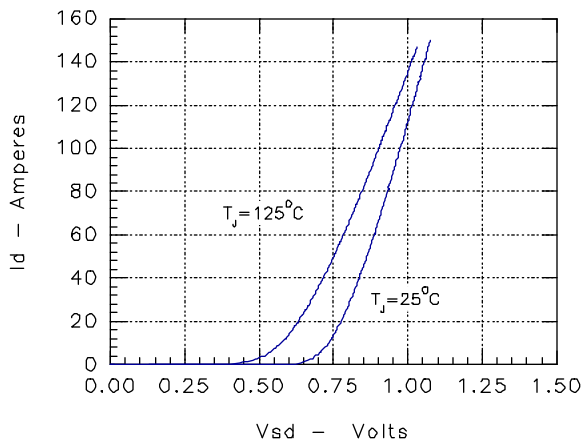


Fig. 10. Transient Thermal Impedance

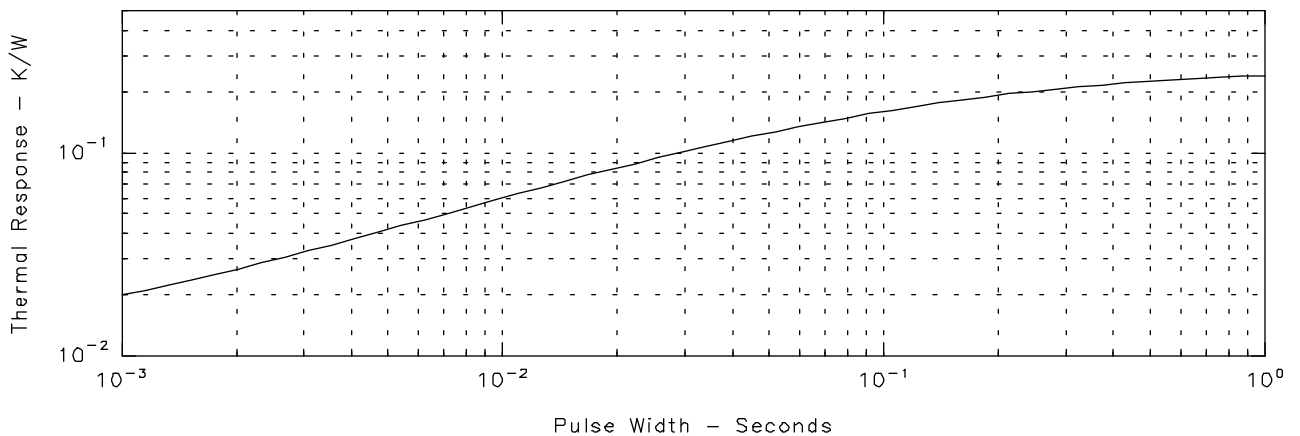

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents:

4,835,592	4,881,106	5,017,508	5,049,961	5,187,117	5,486,715
4,850,072	4,931,844	5,034,796	5,063,307	5,237,481	5,381,025



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.