

# Thyristor

$$V_{RRM} = 1600\text{ V}$$

$$I_{TAV} = 30\text{ A}$$


$$V_T = 1.96\text{ V}$$

## SemiFast Single Thyristor

### Part number


**CME30E1600PZ**

Marking on Product: CME30E1600PZ



Backside: anode

ESD Level: H3B



### Features / Advantages:

- Thyristor for line and moderate frequencies
- Short turn-off time
- Planar passivated chip
- Long-term stability

### Applications:

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

### Package: TO-263 (D2Pak-HV)

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0
- High creepage distance between terminals


### Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).

| Thyristor      |                                                      |                                                                                                                                                                         |                                | Ratings |      |      |                  |
|----------------|------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|---------|------|------|------------------|
| Symbol         | Definition                                           | Conditions                                                                                                                                                              |                                | min.    | typ. | max. | Unit             |
| $V_{RSM/DSM}$  | max. non-repetitive reverse/forward blocking voltage | $T_{VJ} = 25^{\circ}\text{C}$                                                                                                                                           |                                |         |      | 1700 | V                |
| $V_{RRM/DRM}$  | max. repetitive reverse/forward blocking voltage     | $T_{VJ} = 25^{\circ}\text{C}$                                                                                                                                           |                                |         |      | 1600 | V                |
| $I_{R/D}$      | reverse current, drain current                       | $V_{R/D} = 1600\text{ V}$                                                                                                                                               | $T_{VJ} = 25^{\circ}\text{C}$  |         |      | 50   | $\mu\text{A}$    |
|                |                                                      | $V_{R/D} = 1600\text{ V}$                                                                                                                                               | $T_{VJ} = 125^{\circ}\text{C}$ |         |      | 2    | mA               |
| $V_T$          | forward voltage drop                                 | $I_T = 30\text{ A}$                                                                                                                                                     | $T_{VJ} = 25^{\circ}\text{C}$  |         |      | 1.92 | V                |
|                |                                                      | $I_T = 60\text{ A}$                                                                                                                                                     |                                |         |      | 2.47 | V                |
|                |                                                      | $I_T = 30\text{ A}$                                                                                                                                                     | $T_{VJ} = 125^{\circ}\text{C}$ |         |      | 1.96 | V                |
|                |                                                      | $I_T = 60\text{ A}$                                                                                                                                                     |                                |         |      | 2.68 | V                |
| $I_{TAV}$      | average forward current                              | $T_C = 80^{\circ}\text{C}$<br>180° sine                                                                                                                                 | $T_{VJ} = 150^{\circ}\text{C}$ |         |      | 30   | A                |
| $V_{T0}$       | threshold voltage                                    | } for power loss calculation only                                                                                                                                       | $T_{VJ} = 150^{\circ}\text{C}$ |         |      | 1.23 | V                |
| $r_T$          | slope resistance                                     |                                                                                                                                                                         |                                |         |      | 25   | m $\Omega$       |
| $R_{thJC}$     | thermal resistance junction to case                  |                                                                                                                                                                         |                                |         |      | 0.75 | K/W              |
| $R_{thCH}$     | thermal resistance case to heatsink                  |                                                                                                                                                                         |                                |         | 0.25 |      | K/W              |
| $P_{tot}$      | total power dissipation                              |                                                                                                                                                                         | $T_C = 25^{\circ}\text{C}$     |         |      | 165  | W                |
| $I_{TSM}$      | max. forward surge current                           | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$                                                                                                                        | $T_{VJ} = 45^{\circ}\text{C}$  |         |      | 260  | A                |
|                |                                                      | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$                                                                                                                       | $V_R = 0\text{ V}$             |         |      | 280  | A                |
|                |                                                      | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$                                                                                                                        | $T_{VJ} = 150^{\circ}\text{C}$ |         |      | 220  | A                |
|                |                                                      | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$                                                                                                                       | $V_R = 0\text{ V}$             |         |      | 240  | A                |
| $I^2t$         | value for fusing                                     | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$                                                                                                                        | $T_{VJ} = 45^{\circ}\text{C}$  |         |      | 340  | A <sup>2</sup> s |
|                |                                                      | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$                                                                                                                       | $V_R = 0\text{ V}$             |         |      | 325  | A <sup>2</sup> s |
|                |                                                      | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$                                                                                                                        | $T_{VJ} = 150^{\circ}\text{C}$ |         |      | 240  | A <sup>2</sup> s |
|                |                                                      | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$                                                                                                                       | $V_R = 0\text{ V}$             |         |      | 240  | A <sup>2</sup> s |
| $C_J$          | junction capacitance                                 | $V_R = 400\text{ V}$ $f = 1\text{ MHz}$                                                                                                                                 | $T_{VJ} = 25^{\circ}\text{C}$  |         | 13   |      | pF               |
| $P_{GM}$       | max. gate power dissipation                          | $t_p = 30\text{ }\mu\text{s}$                                                                                                                                           | $T_C = 150^{\circ}\text{C}$    |         |      | 10   | W                |
|                |                                                      | $t_p = 300\text{ }\mu\text{s}$                                                                                                                                          |                                |         |      | 5    | W                |
| $P_{GAV}$      | average gate power dissipation                       |                                                                                                                                                                         |                                |         |      | 0.5  | W                |
| $(di/dt)_{cr}$ | critical rate of rise of current                     | $T_{VJ} = 125^{\circ}\text{C}; f = 50\text{ Hz}$ repetitive, $I_T = 90\text{ A}$                                                                                        |                                |         |      | 150  | A/ $\mu\text{s}$ |
|                |                                                      | $t_p = 200\text{ }\mu\text{s}; di_G/dt = 0.2\text{ A}/\mu\text{s};$<br>$I_G = 0.2\text{ A}; V = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 30\text{ A}$                    |                                |         |      | 500  | A/ $\mu\text{s}$ |
| $(dv/dt)_{cr}$ | critical rate of rise of voltage                     | $V = \frac{2}{3} V_{DRM}$<br>$R_{GK} = \infty$ ; method 1 (linear voltage rise)                                                                                         | $T_{VJ} = 125^{\circ}\text{C}$ |         |      | 500  | V/ $\mu\text{s}$ |
| $V_{GT}$       | gate trigger voltage                                 | $V_D = 6\text{ V}$                                                                                                                                                      | $T_{VJ} = 25^{\circ}\text{C}$  |         |      | 1.3  | V                |
|                |                                                      |                                                                                                                                                                         | $T_{VJ} = -40^{\circ}\text{C}$ |         |      | 1.6  | V                |
| $I_{GT}$       | gate trigger current                                 | $V_D = 6\text{ V}$                                                                                                                                                      | $T_{VJ} = 25^{\circ}\text{C}$  |         |      | 50   | mA               |
|                |                                                      |                                                                                                                                                                         | $T_{VJ} = -40^{\circ}\text{C}$ |         |      | 80   | mA               |
| $V_{GD}$       | gate non-trigger voltage                             | $V_D = \frac{2}{3} V_{DRM}$                                                                                                                                             | $T_{VJ} = 150^{\circ}\text{C}$ |         |      | 0.2  | V                |
| $I_{GD}$       | gate non-trigger current                             |                                                                                                                                                                         |                                |         |      | 1    | mA               |
| $I_L$          | latching current                                     | $t_p = 10\text{ }\mu\text{s}$                                                                                                                                           | $T_{VJ} = 25^{\circ}\text{C}$  |         |      | 120  | mA               |
|                |                                                      | $I_G = 0.2\text{ A}; di_G/dt = 0.2\text{ A}/\mu\text{s}$                                                                                                                |                                |         |      |      |                  |
| $I_H$          | holding current                                      | $V_D = 6\text{ V}$ $R_{GK} = \infty$                                                                                                                                    | $T_{VJ} = 25^{\circ}\text{C}$  |         |      | 90   | mA               |
| $t_{gd}$       | gate controlled delay time                           | $V_D = \frac{1}{2} V_{DRM}$                                                                                                                                             | $T_{VJ} = 25^{\circ}\text{C}$  |         |      | 2    | $\mu\text{s}$    |
|                |                                                      | $I_G = 0.5\text{ A}; di_G/dt = 0.5\text{ A}/\mu\text{s}$                                                                                                                |                                |         |      |      |                  |
| $t_q$          | turn-off time                                        | $V_R = 20\text{ V}; I_T = 30\text{ A}; V = \frac{2}{3} V_{DRM}$<br>$di/dt = 10\text{ A}/\mu\text{s}$ $dv/dt = 1000\text{ V}/\mu\text{s}$ $t_p = 200\text{ }\mu\text{s}$ | $T_{VJ} = 125^{\circ}\text{C}$ |         | 120  |      | $\mu\text{s}$    |

| Package TO-263 (D2Pak-HV) |                                                              |                      | Ratings |      |      |      |
|---------------------------|--------------------------------------------------------------|----------------------|---------|------|------|------|
| Symbol                    | Definition                                                   | Conditions           | min.    | typ. | max. | Unit |
| $I_{RMS}$                 | RMS current                                                  | per terminal         |         |      | 35   | A    |
| $T_{VJ}$                  | virtual junction temperature                                 |                      | -40     |      | 150  | °C   |
| $T_{op}$                  | operation temperature                                        |                      | -40     |      | 125  | °C   |
| $T_{stg}$                 | storage temperature                                          |                      | -40     |      | 150  | °C   |
| <b>Weight</b>             |                                                              |                      |         | 1.5  |      | g    |
| $F_C$                     | mounting force with clip                                     |                      | 20      |      | 60   | N    |
| $d_{Spp/App}$             | creepage distance on surface / striking distance through air | terminal to terminal | 4.2     |      |      | mm   |
| $d_{Spb/Apb}$             |                                                              | terminal to backside | 4.7     |      |      | mm   |

### Product Marking

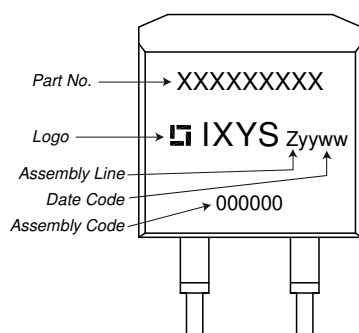

### Part description


C = Thyristor (SCR)  
 M = Thyristor  
 E = Semifast (up to 1800V)  
 30 = Current Rating [A]  
 E = Single Thyristor  
 1600 = Reverse Voltage [V]  
 PZ = TO-263AB (D2Pak) (2HV)


| Ordering    | Ordering Number  | Marking on Product | Delivery Mode | Quantity | Code No. |
|-------------|------------------|--------------------|---------------|----------|----------|
| Standard    | CME30E1600PZ-TRL | CME30E1600PZ       | Tape & Reel   | 800      | 512781   |
| Alternative | CME30E1600PZ-TUB | CME30E1600PZ       | Tube          | 50       | 523828   |

### Equivalent Circuits for Simulation

\* on die level


$T_{VJ} = 150\text{ °C}$

|                                                                                     |                    |      |                  |
|-------------------------------------------------------------------------------------|--------------------|------|------------------|
|  |                    |      | <b>Thyristor</b> |
| $V_{0\text{ max}}$                                                                  | threshold voltage  | 1.23 | V                |
| $R_{0\text{ max}}$                                                                  | slope resistance * | 22   | mΩ               |

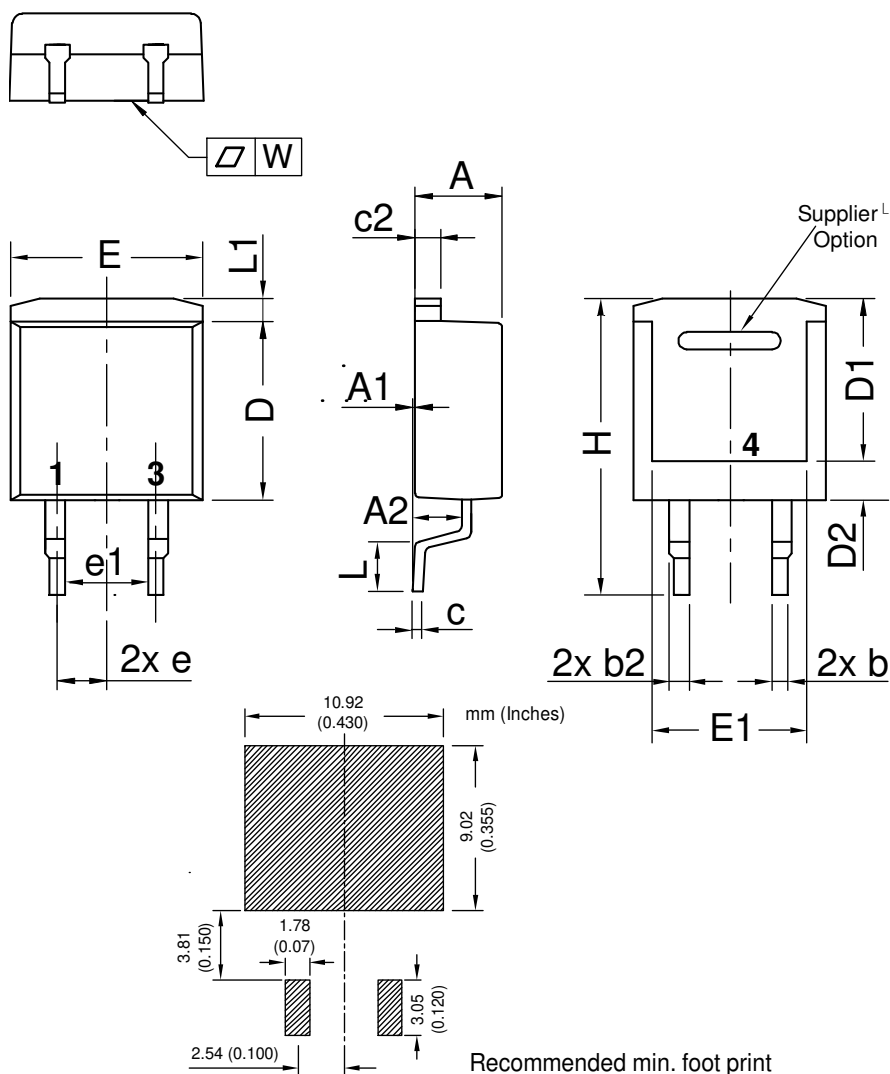**Outlines TO-263 (D2Pak-HV)**


| Dim. | Millimeter |       | Inches      |       |
|------|------------|-------|-------------|-------|
|      | min        | max   | min         | max   |
| A    | 4.06       | 4.83  | 0.160       | 0.190 |
| A1   | typ. 0.10  |       | typ. 0.004  |       |
| A2   | 2.41       |       | 0.095       |       |
| b    | 0.51       | 0.99  | 0.020       | 0.039 |
| b2   | 1.14       | 1.40  | 0.045       | 0.055 |
| c    | 0.40       | 0.74  | 0.016       | 0.029 |
| c2   | 1.14       | 1.40  | 0.045       | 0.055 |
| D    | 8.38       | 9.40  | 0.330       | 0.370 |
| D1   | 8.00       | 8.89  | 0.315       | 0.350 |
| D2   | 2.3        |       | 0.091       |       |
| E    | 9.65       | 10.41 | 0.380       | 0.410 |
| E1   | 6.22       | 8.50  | 0.245       | 0.335 |
| e    | 2,54 BSC   |       | 0,100 BSC   |       |
| e1   | 4.28       |       | 0.169       |       |
| H    | 14.61      | 15.88 | 0.575       | 0.625 |
| L    | 1.78       | 2.79  | 0.070       | 0.110 |
| L1   | 1.02       | 1.68  | 0.040       | 0.066 |
| W    | typ. 0.02  | 0.040 | typ. 0.0008 | 0.002 |

All dimensions conform with and/or within JEDEC standard.



## Thyristor

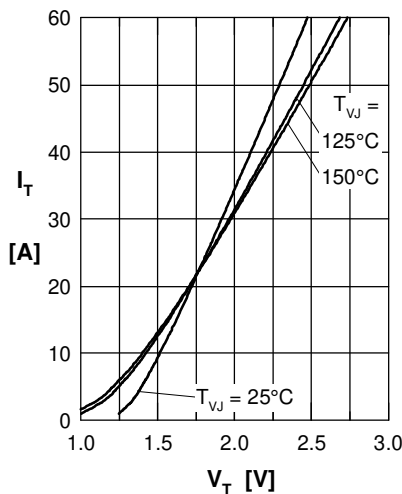


Fig. 1 Forward characteristics

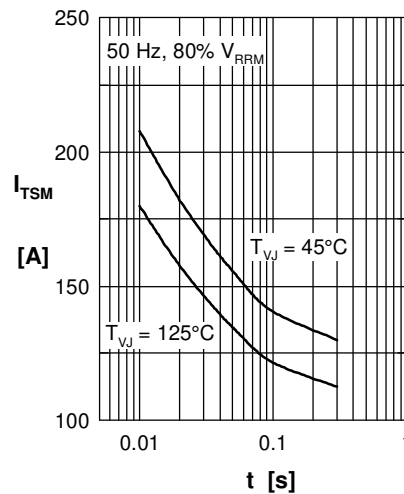


Fig. 2 Surge overload current  
 $I_{TSM}$ : crest value,  $t$ : duration

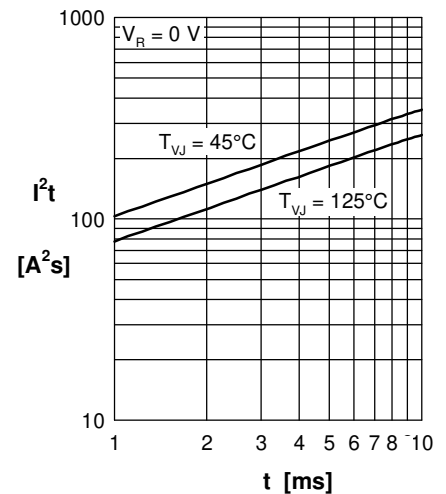


Fig. 3  $I^2t$  versus time (1-10 s)

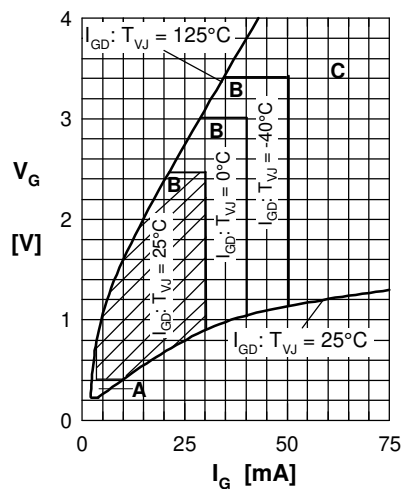


Fig. 4 Gate voltage & gate current  
Triggering: A = no; B = possible; C = safe

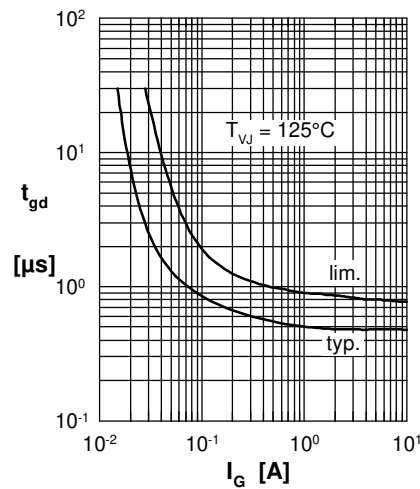


Fig. 5 Gate controlled delay time  $t_{gd}$

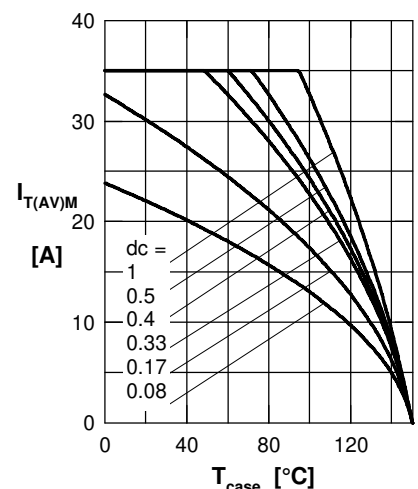


Fig. 6 Max. forward current at case temperature

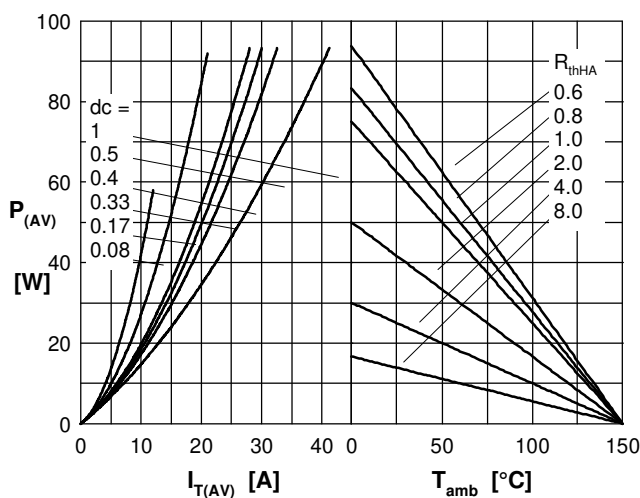


Fig. 7a Power dissipation versus direct output current  
Fig. 7b and ambient temperature

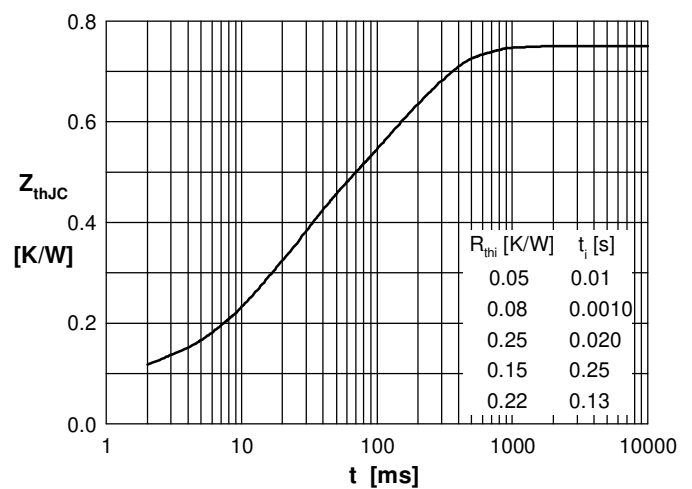


Fig. 7 Transient thermal impedance junction to case