

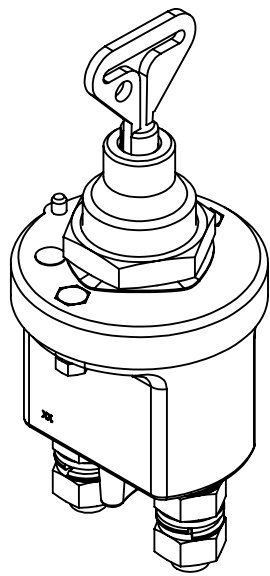
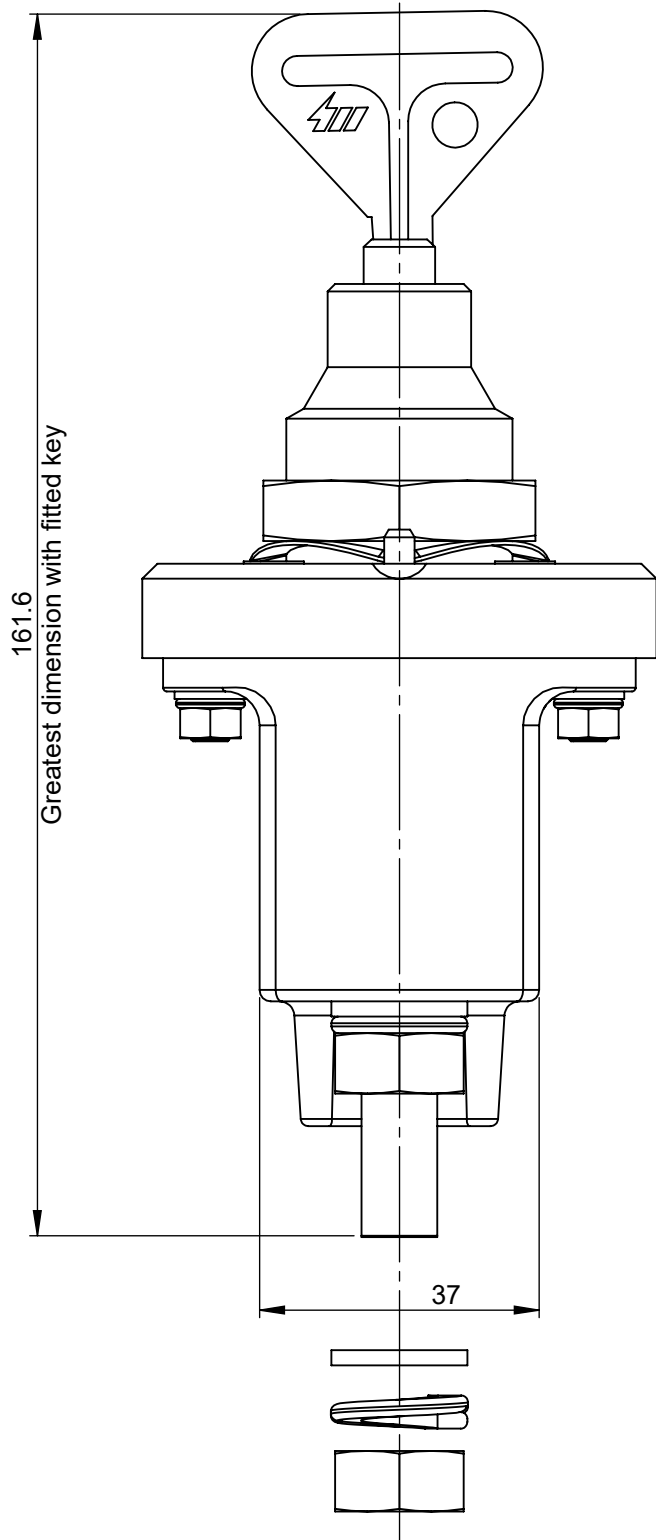
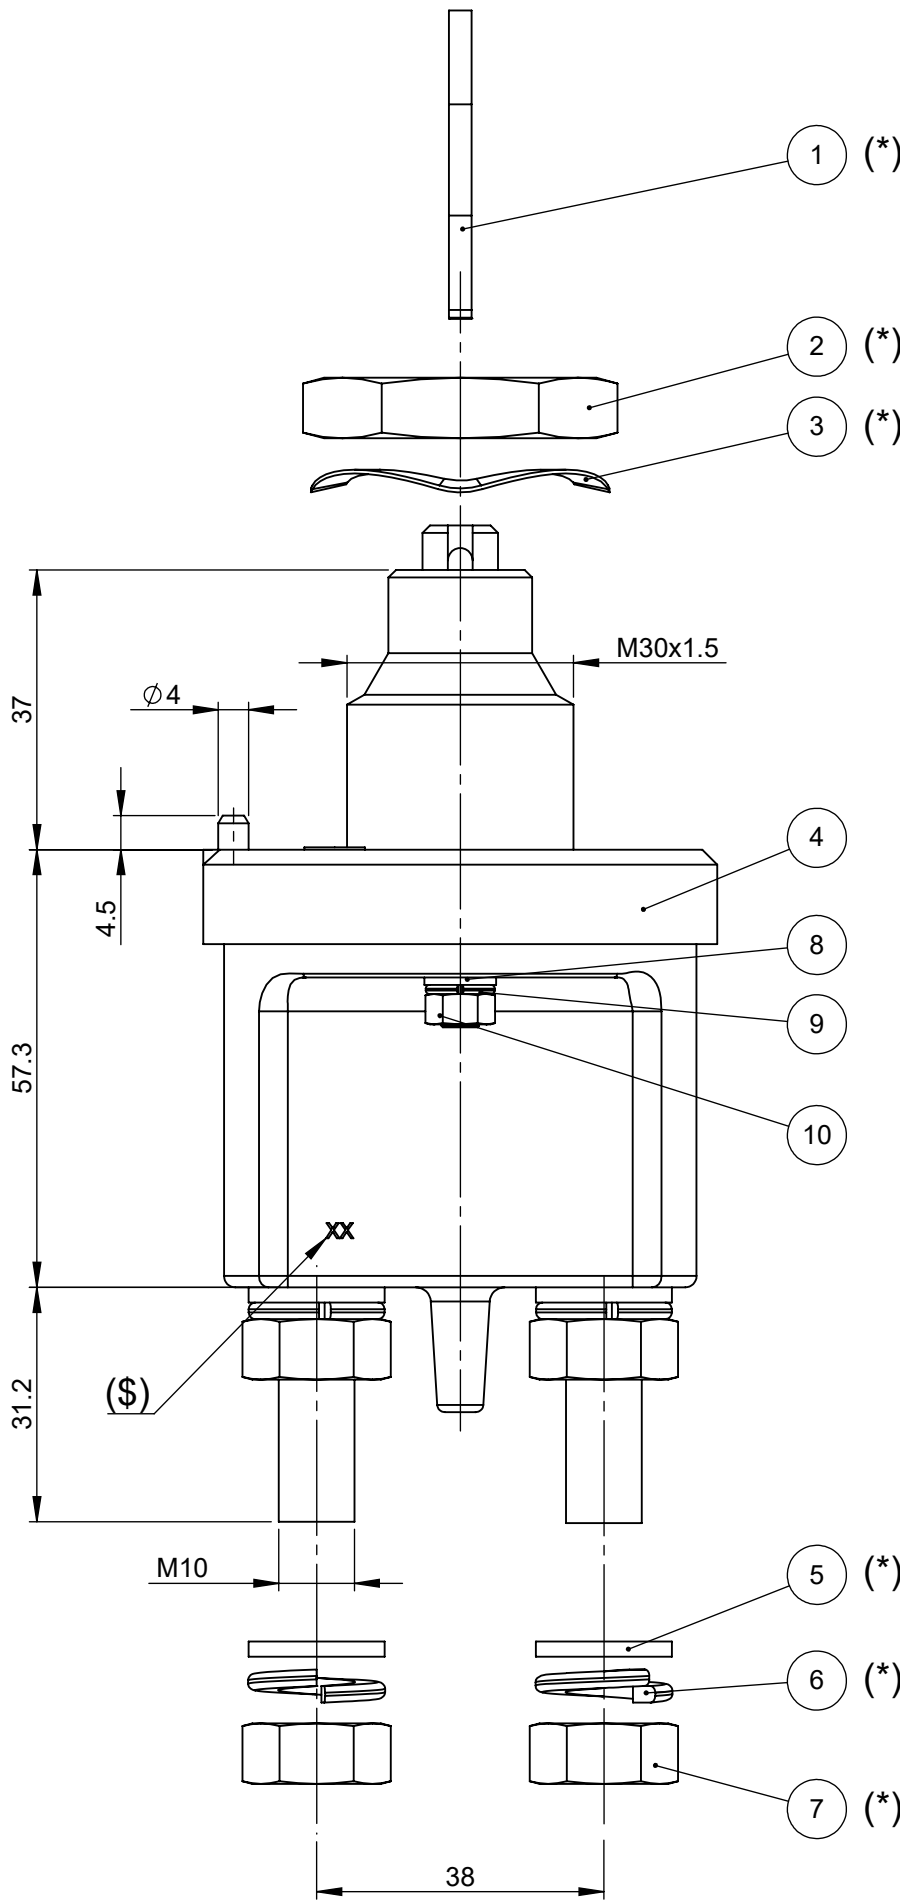
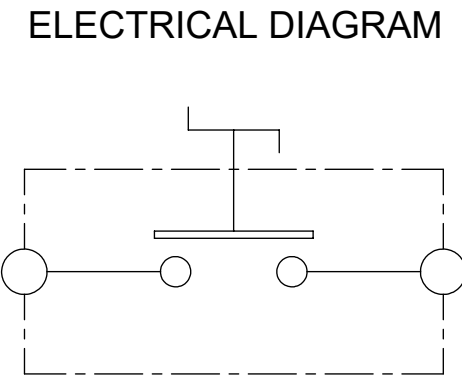


REV.		REVISIONS		
		DATE	DESIGNED	APPROVED
A	First issue of outline drawing	22-Jan-21	L.Dal Molin	M.Tinto
B	Note added	26-Mar-21	L.Dal Molin	M.Tinto

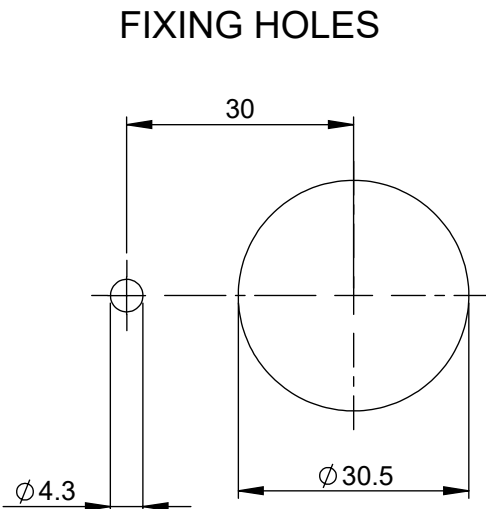

10		Nut M5	Steel	2	EA
9		Grower washer To 5	Steel	2	EA
8		Plane washer Tc 5.3x9.5	Steel	2	EA
7		Nut M10	Brass	2	EA
6		Grower washer B10	Bronze	2	EA
5		Plane washer 10.3x18	Brass	2	EA
4		Complete switch		1	EA
3		Elastic ring	Steel	1	EA
2		Nut M30x1.5	Brass	1	EA
1		Key	Steel	1	EA
POS.	P/N	DESCRIPTIONS	MATERIAL	Q.TY	U/M

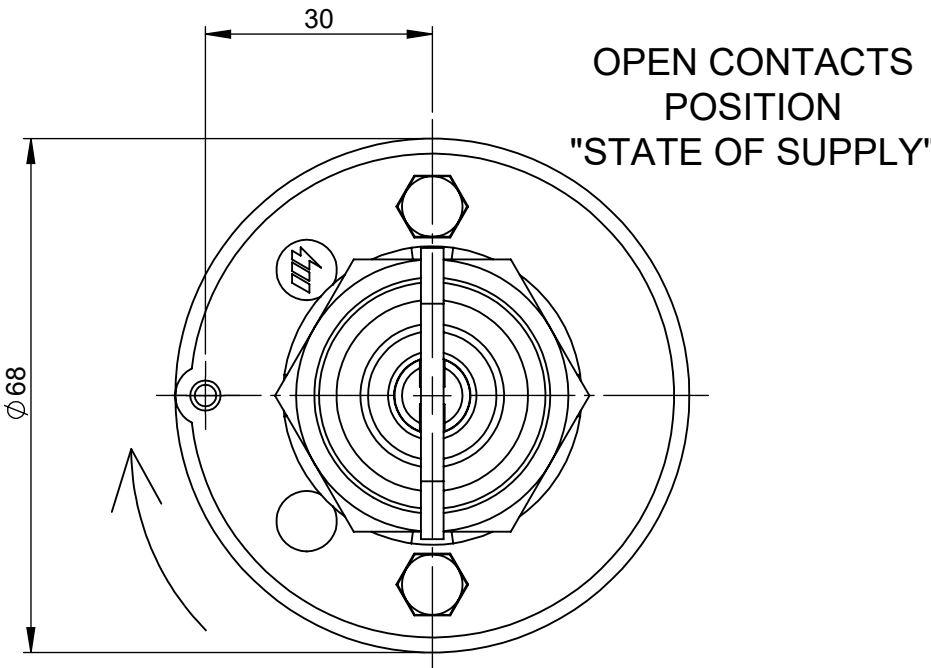

PRESCRIPTIONS


- Contacts lock by 90° clockwise rotation of key
- (\$) Marking of manufacturing date, indifferently on right or left terminal
- (*) Key, nut M30x1.5, elastic ring, nuts and washers supplied in the kit

CHARACTERISTICS

- Max operating voltage: 24 DC
- Max continuous current: 250A
- Intermittent current: 2500A at 3 sec.
- Handle operating torque: 1.5(±0.5) Nm
- M10 nut closing pair: 19(±3) Nm
- M5 nut closing pair: 1.5(±0.5) Nm
- Locking nut M30x1.5: 35(±5) Nm
- Maximum thickness lockable with nut M30: 12mm
- Ⓑ - Key operating torque: 2±0.5 Nm

SAP drawing number: 10000106316

Material and treatments:

DIMENSIONS AND TOLERANCES IN MILLIMETERS, DEFINED ACCORDING TO ISO 1101-2017.					
linear dimensions					
0,5 3	>3 6	>6 30	>30 120	>120 400	>400 1000
±0,2	±0,3	±0,5	±0,8	±1,2	±2
angle (for range of lengths)					
up to 10	>10 50	>50 120	>120 400	>400 1000	>1000 2000
±1°30'	±1°	±0°30'	±0°15'		
●	FIT/ FUNCTION CRITICAL CHARACTERISTICS SYMBOL				
<S>	SAFETY/ COMPLIANCE CRITICAL CHARACTERISTICS SYMBOL				
CPK	DENOTES CPK DIMENSIONS MINIMUM CPK VALUE				
ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE.PROCEDURE FOR MEASUREMENTAND TRACKINGTO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS				
CP	DENOTES CP DIMENSIONS. -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE				
NAME		DATE		 Expertise Applied Answers Delivered	
DRAWN		L. Dal Molin			
CHECKED		-			
-		-			
-		-		TITLE	
FORM NO: CVP-PE40-0013 REV A		250 A MANUAL BATTERY MASTER			
FIRST ANGLE PROJECTION		SWITCH WITH REMOVABLE KEY			
		SIZE: A2		DWG. NO. OL-08098300	
DO NOT SCALE DRAWING		SCALE 1:1		OUTLINE REV: B	
				SHEET 1 OF 1	