
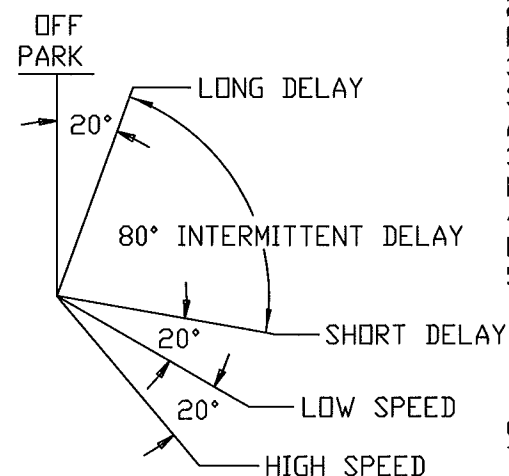


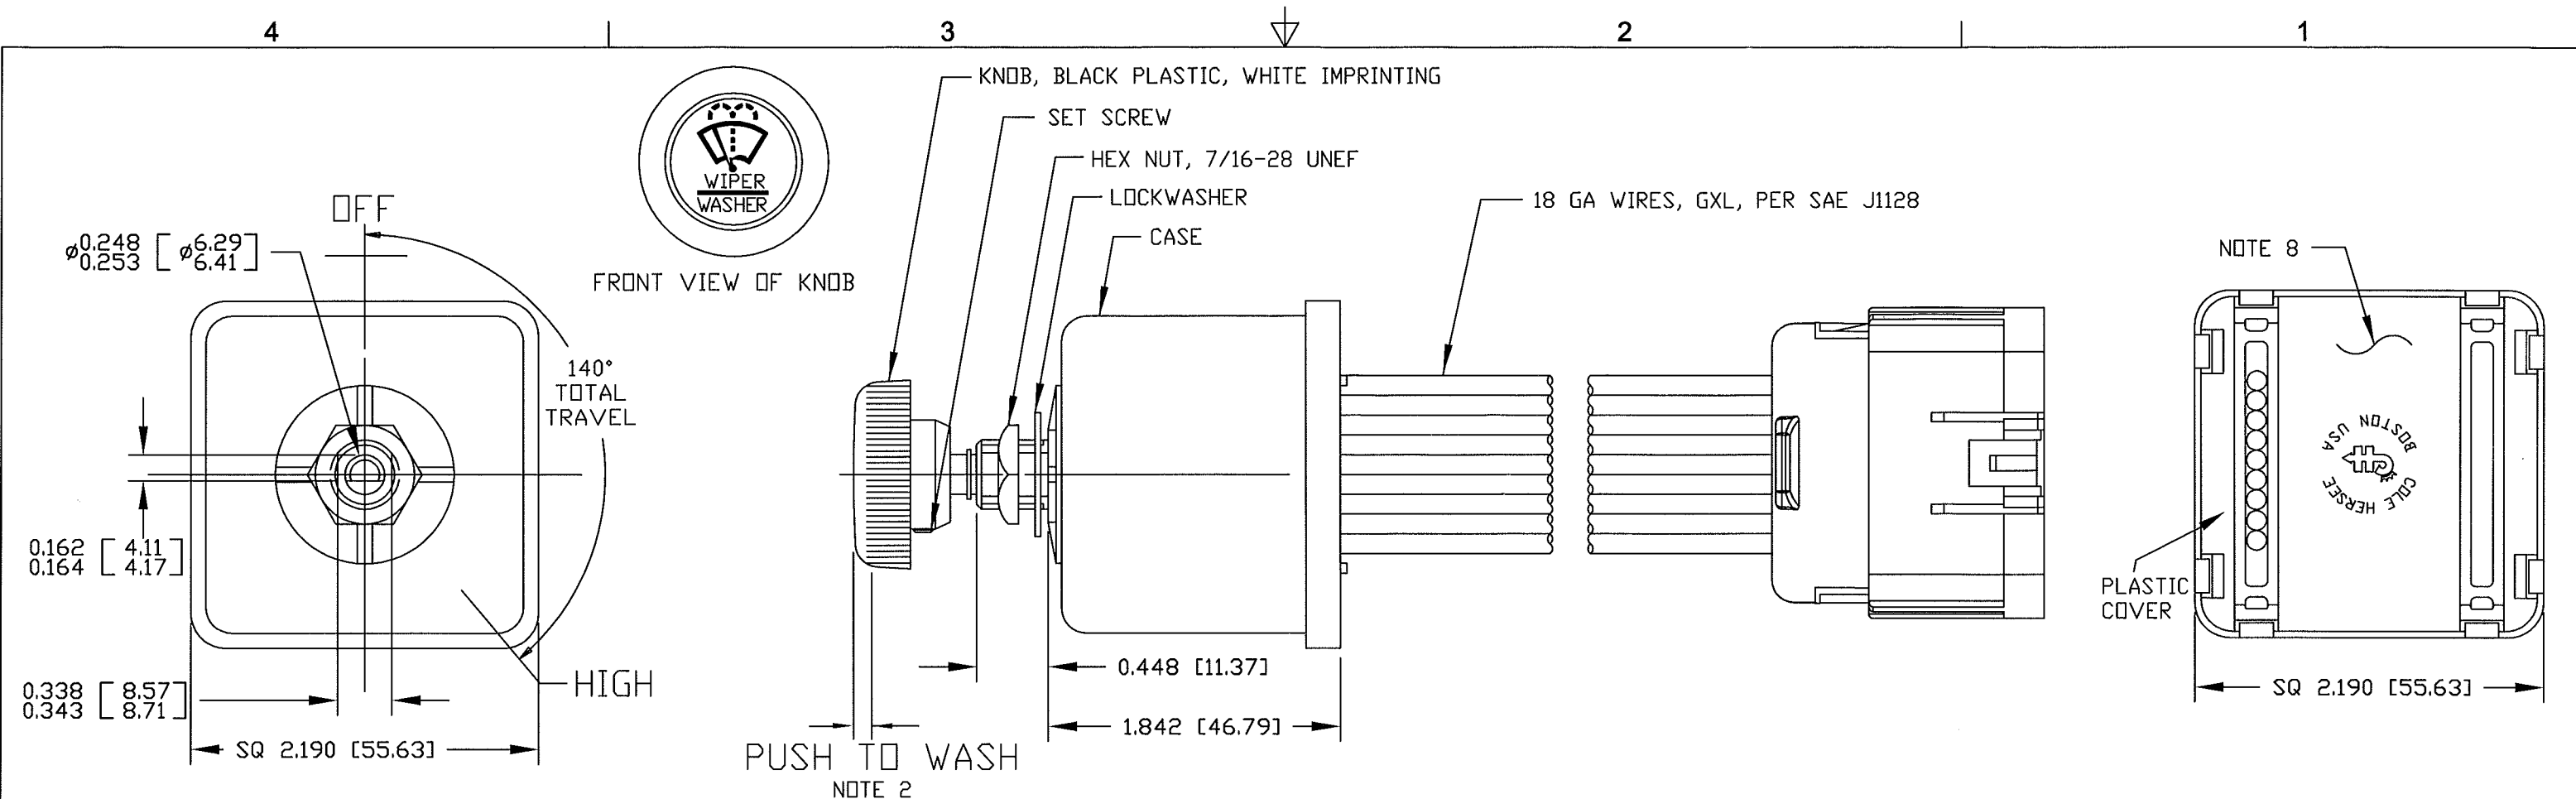


NOTES:


1. DESIGNED FOR 12V SYSTEM, DUAL MOTOR, DYNAMIC AND NON-DYNAMIC PARK.
2. PUSH TO WASH FUNCTION RESULTS IN 3 WIPES AFTER RELEASE OF PUSH SWITCH.
3. RATING: VOLTAGE OPERATING RANGE 9VDC TO 16VDC ROTARY SWITCH ACTUATION 20,000 CYCLES MINIMUM. MOTOR DRIVE: 10 AMPS PER MOTOR CONTINUOUS. START-UP/STALL/LOCKED-ROTOR 30 AMPS. WASHER CIRCUIT 3 AMPS, PUSH SWITCH 20,000 CYCLES MINIMUM.
4. MICROPROCESSOR CONTROLLED, SOLID-STATE RELAY, CURRENT LIMIT SENSE CIRCUIT, REVERSE POLARITY PROTECTED
5. CONFORMS TO SAE J1455;

4.11 GENERAL HEAVY DUTY TRUCK ELECTRICAL ENVIRONMENT.
4.11.1 STEADY-STATE ELECTRICAL CHARACTERISTICS.
4.11.2 TRANSIENT, NOISE AND ELECTROSTATIC
CHARACTERISTICS.

6. INTERMITTENT DELAYS: 1, 2, 4, 7, 11 AND 16 SECONDS
7. ALL DIMENSIONS ARE REFERENCE ONLY UNLESS NOTED OTHERWISE.
8. COLE HERSEE PART NUMBER, REVISION, & DATE CODE STAMPED IN WHITE ON REAR PLASTIC COVER.

<u>COLOR</u>	<u>FUNCTION</u>	<u>TERMINAL</u>
YELLOW	LOW-SPEED MOTOR #1	A
RED	VBB (12V POWER)	B
WHITE	HIGH-SPEED MOTOR#1	C
BLUE	PARK MOTOR #1	D
N/C	N/C	E
BROWN	WASHER	F
GREY	HIGH-SPEED MOTOR #2	G
PURPLE	PARK MOTOR #2	H
ORANGE	LOW-SPEED MOTOR #2	J
BLACK	GROUND (0V)	K
N/C	N/C	L
N/C	N/C	M

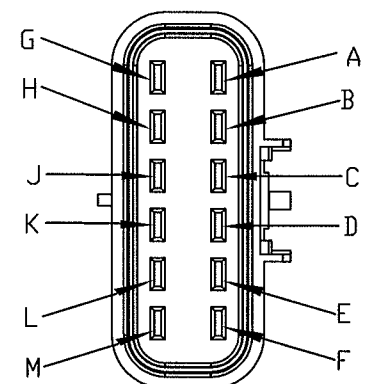

<u>Revision Control Record</u>				Rev.	Description of Change	ECN No.	Date	Tolerances Unless otherwise specifically noted, the following are default tolerances; 2-places +/- 0.02" 3-places +/- 0.005" Angular +/- .1" Metric: Shown in [] refers to equivalent English Dlm Tol "REF." or an Asterisk (*) = Non-Toleranced Reference Dimension, shown for clarification purposes only. NOTE: All tolerances are Non-Cumulative.			PROPRIETARY INFORMATION This Engineering Drawing, and the Information contained herein, is proprietary to Cole Hersee Company and may not be disclosed, re-produced, or in any other way transferred or communicated to any other party without the express written consent of an authorized representative of Cole Hersee Company.			Special Characteristics:  Critical Characteristic, relating to Safety and/or Regulatory Compliance  Significant Characteristic relating to Process Control  Control Dimension relating to Form - Fit - Function as defined by Cole Hersee Company and/or the Customer			 Cole Hersee Co. 20 Old Colony Ave., South Boston, MA, 02127 Phn: 617-268-2100 Web: www.colehersee.com		
Rev.	Description of Change	ECN No.	Date																
A	RELEASED DRAWING	12056	02-02-12																
								FORM CHT-6 (2/07)	Used On or Ref.:	EX28941	Scale: 1:1	Drawn BY: PMV	Date Drawn: 01/23/12	Pg. 1 of 1	<u>Drawing / Part No.:</u> 75600-32		<u>Current Rev.:</u> A		