


## Polar™ Power MOSFET

**IXTT170N10P**  
**IXTQ170N10P**  
**IXTK170N10P**

**$V_{DSS} = 100V$**   
 **$I_{D25} = 170A$**   
 **$R_{DS(on)} \leq 9m\Omega$**


N-Channel Enhancement Mode  
Avalanche Rated




| Symbol        | Test Conditions                                                    | Maximum Ratings |            |
|---------------|--------------------------------------------------------------------|-----------------|------------|
| $V_{DSS}$     | $T_J = 25^\circ C$ to $175^\circ C$                                | 100             | V          |
| $V_{DGR}$     | $T_J = 25^\circ C$ to $175^\circ C$ , $R_{GS} = 1M\Omega$          | 100             | V          |
| $V_{GSS}$     | Continuous                                                         | $\pm 20$        | V          |
| $V_{GSM}$     | Transient                                                          | $\pm 30$        | V          |
| $I_{D25}$     | $T_C = 25^\circ C$                                                 | 170             | A          |
| $I_{L(RMS)}$  | External Lead Current Limit                                        | 160             | A          |
| $I_{DM}$      | $T_C = 25^\circ C$ , Pulse Width Limited by $T_{JM}$               | 350             | A          |
| $I_A$         | $T_C = 25^\circ C$                                                 | 60              | A          |
| $E_{AS}$      | $T_C = 25^\circ C$                                                 | 2               | J          |
| $dv/dt$       | $I_S \leq I_{DM}$ , $V_{DD} \leq V_{DSS}$ , $T_J \leq 175^\circ C$ | 10              | V/ns       |
| $P_D$         | $T_C = 25^\circ C$                                                 | 715             | W          |
| $T_J$         |                                                                    | -55 to +175     | $^\circ C$ |
| $T_{JM}$      |                                                                    | +175            | $^\circ C$ |
| $T_{stg}$     |                                                                    | -55 to +175     | $^\circ C$ |
| $T_L$         | 1.6mm (0.063in) from Case for 10s                                  | 300             | $^\circ C$ |
| $T_{SOLD}$    | Plastic Body for 10s                                               | 260             | $^\circ C$ |
| $M_d$         | Mounting Torque (TO-264 & TO-3P)                                   | 1.13/10         | Nm/lb.in.  |
| <b>Weight</b> | TO-268                                                             | 4.0             | g          |
|               | TO-3P                                                              | 5.5             | g          |
|               | TO-264                                                             | 10.0            | g          |

| Symbol       | Test Conditions<br>( $T_J = 25^\circ C$ , Unless Otherwise Specified) | Characteristic Values |      |              |
|--------------|-----------------------------------------------------------------------|-----------------------|------|--------------|
|              |                                                                       | Min.                  | Typ. | Max.         |
| $BV_{DSS}$   | $V_{GS} = 0V$ , $I_D = 250\mu A$                                      | 100                   |      | V            |
| $V_{GS(th)}$ | $V_{DS} = V_{GS}$ , $I_D = 250\mu A$                                  | 2.5                   |      | 5.0 V        |
| $I_{GSS}$    | $V_{GS} = \pm 20V$ , $V_{DS} = 0V$                                    |                       |      | $\pm 100$ nA |
| $I_{DSS}$    | $V_{DS} = V_{DSS}$ , $V_{GS} = 0V$<br>$T_J = 150^\circ C$             |                       |      | 25 $\mu A$   |
|              |                                                                       |                       |      | 250 $\mu A$  |
| $R_{DS(on)}$ | $V_{GS} = 10V$ , $I_D = 0.5 \cdot I_{D25}$ , Note 1                   |                       |      | 9 m $\Omega$ |
|              | $V_{GS} = 15V$ , $I_D = 350A$                                         | 7                     |      | m $\Omega$   |


TO-268 (IXTT)



TO-3P (IXTQ)



TO-264 (IXTK)



G = Gate      D = Drain  
S = Source    Tab = Drain

### Features

- International Standard Packages
- Fast Intrinsic Rectifier
- Avalanche Rated
- Low  $R_{DS(ON)}$  and  $Q_G$
- Low Package Inductance

### Advantages

- High Power Density
- Easy to Mount
- Space Savings

### Applications

- Switch-Mode and Resonant-Mode Power Supplies
- DC-DC Converters
- Laser Drivers
- AC and DC Motor Drives
- Robotics and Servo Controls


| Symbol                                                         | Test Conditions                                                                                                                                 | Characteristic Values |      |                         |
|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------|-------------------------|
| $(T_J = 25^\circ\text{C}, \text{ Unless Otherwise Specified})$ |                                                                                                                                                 | Min.                  | Typ. | Max.                    |
| $g_{fs}$                                                       | $V_{DS} = 10\text{V}, I_D = 0.5 \cdot I_{D25}, \text{ Note 1}$                                                                                  | 50                    | 72   | S                       |
| $C_{iss}$                                                      | $V_{GS} = 0\text{V}, V_{DS} = 25\text{V}, f = 1\text{MHz}$                                                                                      |                       | 6000 | pF                      |
| $C_{oss}$                                                      |                                                                                                                                                 |                       | 2340 | pF                      |
| $C_{rss}$                                                      |                                                                                                                                                 |                       | 730  | pF                      |
| $t_{d(on)}$                                                    | <b>Resistive Switching Times</b><br>$V_{GS} = 10\text{V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = 60\text{A}$<br>$R_G = 3.3\Omega \text{ (External)}$ |                       | 35   | ns                      |
| $t_r$                                                          |                                                                                                                                                 |                       | 50   | ns                      |
| $t_{d(off)}$                                                   |                                                                                                                                                 |                       | 90   | ns                      |
| $t_f$                                                          |                                                                                                                                                 |                       | 33   | ns                      |
| $Q_{g(on)}$                                                    | $V_{GS} = 10\text{V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = 0.5 \cdot I_{D25}$                                                                      |                       | 198  | nC                      |
| $Q_{gs}$                                                       |                                                                                                                                                 |                       | 39   | nC                      |
| $Q_{gd}$                                                       |                                                                                                                                                 |                       | 107  | nC                      |
| $R_{thJC}$                                                     |                                                                                                                                                 |                       |      | 0.21 $^\circ\text{C/W}$ |
| $R_{thCS}$                                                     | (TO-3P)                                                                                                                                         |                       | 0.25 | $^\circ\text{C/W}$      |
|                                                                | (TO-264)                                                                                                                                        |                       | 0.15 | $^\circ\text{C/W}$      |

## Source-Drain Diode

| Symbol                                                         | Test Conditions                                                                                 | Characteristic Values |      |               |
|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-----------------------|------|---------------|
| $(T_J = 25^\circ\text{C}, \text{ Unless Otherwise Specified})$ |                                                                                                 | Min.                  | Typ. | Max.          |
| $I_S$                                                          | $V_{GS} = 0\text{V}$                                                                            |                       |      | 170 A         |
| $I_{SM}$                                                       | Repetitive, Pulse Width Limited by $T_{JM}$                                                     |                       |      | 350 A         |
| $V_{SD}$                                                       | $I_F = I_S, V_{GS} = 0\text{V}, \text{ Note 1}$                                                 |                       |      | 1.5 V         |
| $t_{rr}$                                                       | $I_F = 25\text{A}, -di/dt = 100\text{A}/\mu\text{s},$<br>$V_R = 50\text{V}, V_{GS} = 0\text{V}$ |                       | 120  | ns            |
| $Q_{RM}$                                                       |                                                                                                 |                       | 2.0  | $\mu\text{C}$ |

Note 1. Pulse test,  $t \leq 300\mu\text{s}$ , duty cycle,  $d \leq 2\%$ .


## TO-3P (IXTQ) Outline



- 1 - GATE  
2 - DRAIN (COLLECTOR)  
3 - SOURCE (EMITTER)  
4 - DRAIN (COLLECTOR)

| SYM | INCHES   |      | MILLIMETERS |       |
|-----|----------|------|-------------|-------|
|     | MIN.     | MAX. | MIN.        | MAX.  |
| A   | .185     | .193 | 4.70        | 4.90  |
| A1  | .051     | .059 | 1.30        | 1.50  |
| A2  | .057     | .065 | 1.45        | 1.65  |
| b   | .035     | .045 | 0.90        | 1.15  |
| b2  | .075     | .087 | 1.90        | 2.20  |
| b4  | .114     | .126 | 2.90        | 3.20  |
| c   | .022     | .031 | 0.55        | 0.80  |
| D   | .780     | .799 | 19.80       | 20.30 |
| D1  | .665     | .677 | 16.90       | 17.20 |
| E   | .610     | .622 | 15.50       | 15.80 |
| E1  | .531     | .539 | 13.50       | 13.70 |
| e   | .215 BSC |      | 5.45 BSC    |       |
| L   | .779     | .795 | 19.80       | 20.20 |
| L1  | .134     | .142 | 3.40        | 3.60  |
| L2  | .126     | .134 | 3.20        | 3.40  |
| øP1 | .272     | .280 | 6.90        | 7.10  |
| S   | .193     | .201 | 4.90        | 5.10  |


## TO-264 AA (IXTK) Outline



- 1 = Gate  
2 = Drain  
3 = Source  
Tab = Drain

| Dim. | Millimeter |       | Inches   |       |
|------|------------|-------|----------|-------|
|      | Min.       | Max.  | Min.     | Max.  |
| A    | 4.82       | 5.13  | .190     | .202  |
| A1   | 2.54       | 2.89  | .100     | .114  |
| A2   | 2.00       | 2.10  | .079     | .083  |
| b    | 1.12       | 1.42  | .044     | .056  |
| b1   | 2.39       | 2.69  | .094     | .106  |
| b2   | 2.90       | 3.09  | .114     | .122  |
| c    | 0.53       | 0.83  | .021     | .033  |
| D    | 25.91      | 26.16 | 1.020    | 1.030 |
| E    | 19.81      | 19.96 | .780     | .786  |
| e    | 5.46 BSC   |       | .215 BSC |       |
| J    | 0.00       | 0.25  | .000     | .010  |
| K    | 0.00       | 0.25  | .000     | .010  |
| L    | 20.32      | 20.83 | .800     | .820  |
| L1   | 2.29       | 2.59  | .090     | .102  |
| P    | 3.17       | 3.66  | .125     | .144  |
| Q    | 6.07       | 6.27  | .239     | .247  |
| Q1   | 8.38       | 8.69  | .330     | .342  |
| R    | 3.81       | 4.32  | .150     | .170  |
| R1   | 1.78       | 2.29  | .070     | .090  |
| S    | 6.04       | 6.30  | .238     | .248  |
| T    | 1.57       | 1.83  | .062     | .072  |

## TO-268 (IXTT) Outline

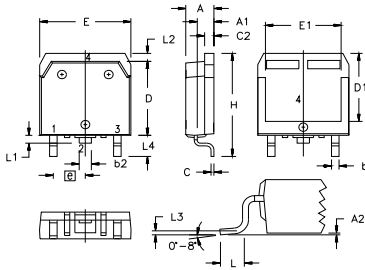

| SYM | INCHES   |      | MILLIMETERS |       |
|-----|----------|------|-------------|-------|
|     | MIN.     | MAX. | MIN.        | MAX.  |
| A   | .193     | .201 | 4.90        | 5.10  |
| A1  | .106     | .114 | 2.70        | 2.90  |
| A2  | .001     | .010 | 0.02        | 0.25  |
| b   | .045     | .057 | 1.15        | 1.45  |
| b2  | .075     | .083 | 1.90        | 2.10  |
| C   | .016     | .026 | 0.40        | 0.65  |
| C2  | .057     | .063 | 1.45        | 1.60  |
| D   | .543     | .551 | 13.80       | 14.00 |
| D1  | .488     | .500 | 12.40       | 12.70 |
| E   | .624     | .632 | 15.85       | 16.05 |
| E1  | .524     | .535 | 13.30       | 13.60 |
| e   | .215 BSC |      | 5.45 BSC    |       |
| H   | .736     | .752 | 18.70       | 19.10 |
| L   | .094     | .106 | 2.40        | 2.70  |
| L1  | .047     | .055 | 1.20        | 1.40  |
| L2  | .039     | .045 | 1.00        | 1.15  |
| L3  | .010 BSC |      | 0.25 BSC    |       |
| L4  | .150     | .161 | 3.80        | 4.10  |

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

|                                                                                  |           |           |           |           |              |              |              |              |              |             |
|----------------------------------------------------------------------------------|-----------|-----------|-----------|-----------|--------------|--------------|--------------|--------------|--------------|-------------|
| IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: | 4,835,592 | 4,931,844 | 5,049,961 | 5,237,481 | 6,162,665    | 6,404,065 B1 | 6,683,344    | 6,727,585    | 7,005,734 B2 | 7,157,338B2 |
|                                                                                  | 4,850,072 | 5,017,508 | 5,063,307 | 5,381,025 | 6,259,123 B1 | 6,534,343    | 6,710,405 B2 | 6,759,692    | 7,063,975 B2 |             |
|                                                                                  | 4,881,106 | 5,034,796 | 5,187,117 | 5,486,715 | 6,306,728 B1 | 6,583,505    | 6,710,463    | 6,771,478 B2 | 7,071,537    |             |

Fig. 1. Output Characteristics @  $T_J = 25^\circ\text{C}$

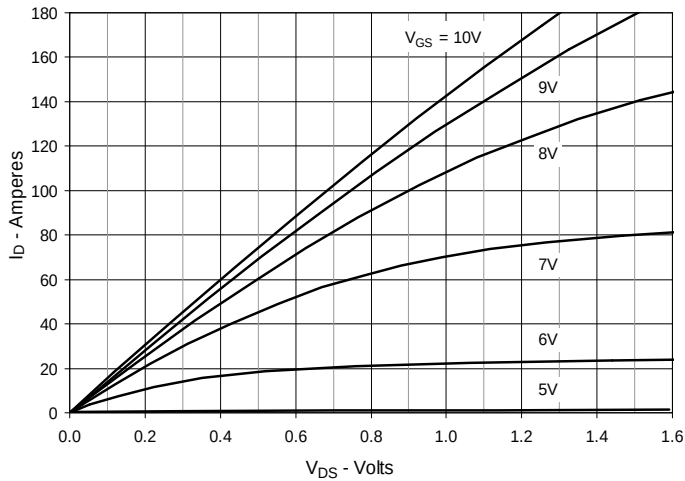


Fig. 2. Extended Output Characteristics @  $T_J = 25^\circ\text{C}$

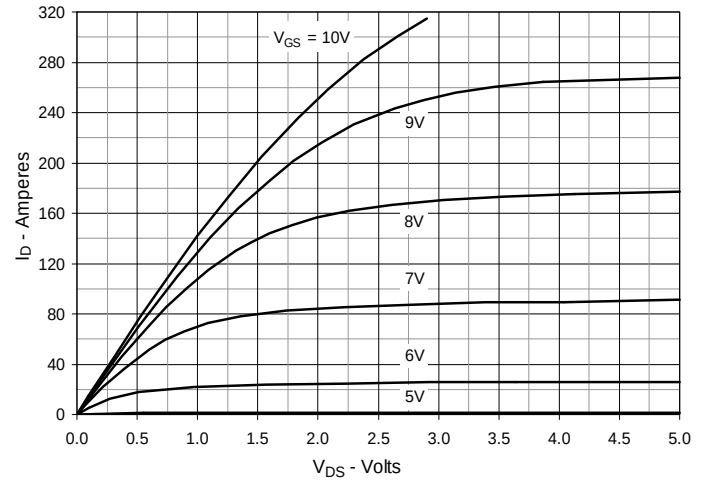


Fig. 3. Output Characteristics @  $T_J = 150^\circ\text{C}$

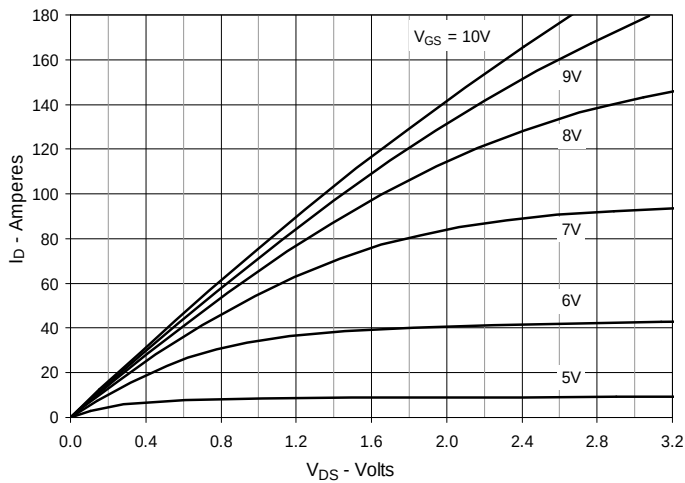


Fig. 4.  $R_{DS(on)}$  Normalized to  $I_D = 85\text{A}$  Value vs. Junction Temperature

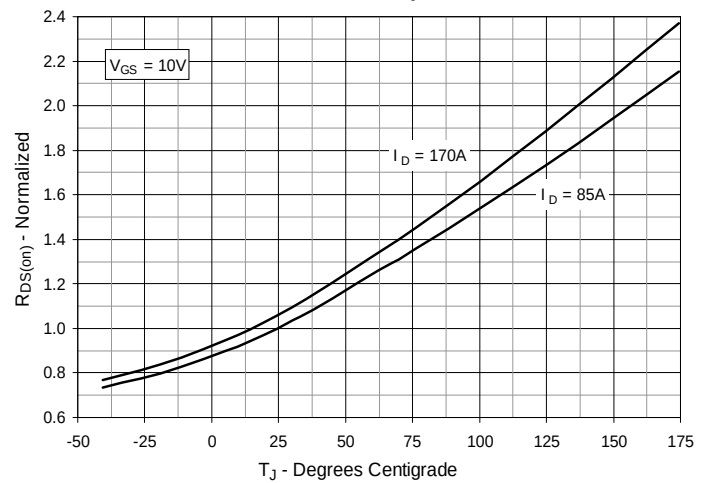


Fig. 5.  $R_{DS(on)}$  Normalized to  $I_D = 85\text{A}$  Value vs. Drain Current



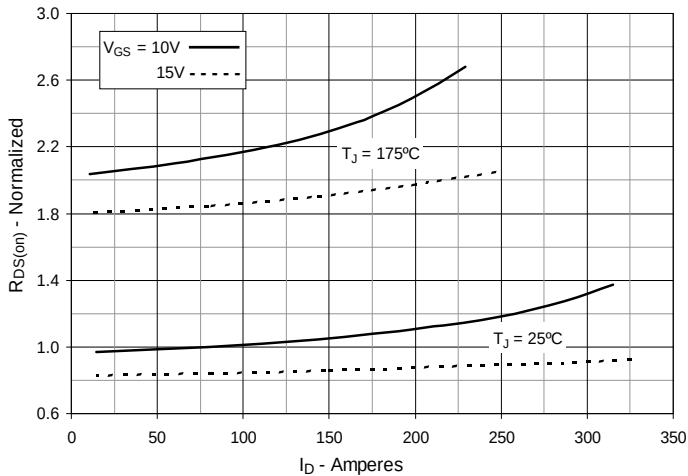



Fig. 6. Maximum Drain Current vs. Case Temperature

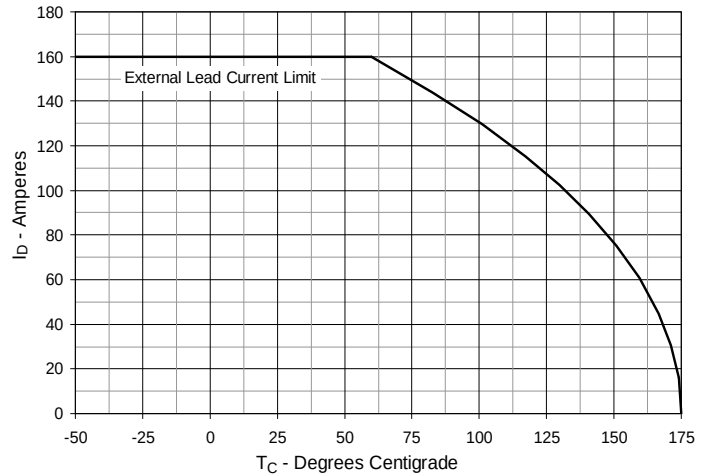


**Fig. 7. Input Admittance**

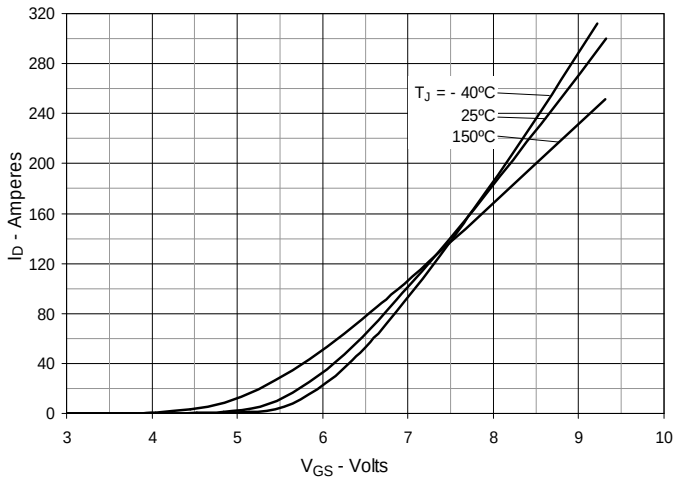


**Fig. 8. Transconductance**

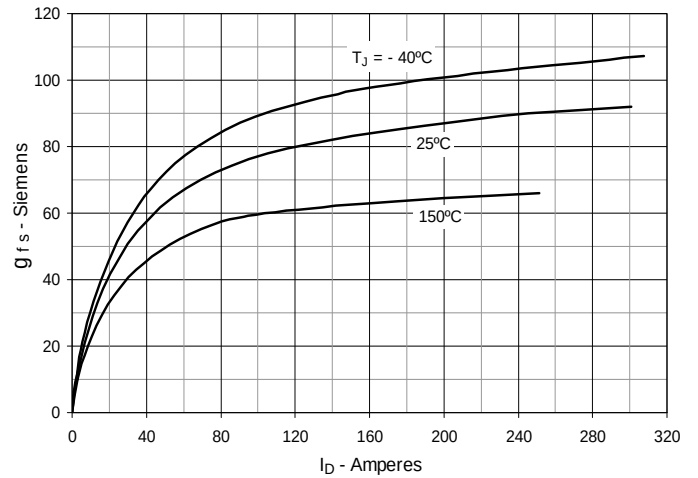


**Fig. 9. Forward Voltage Drop of Intrinsic Diode**

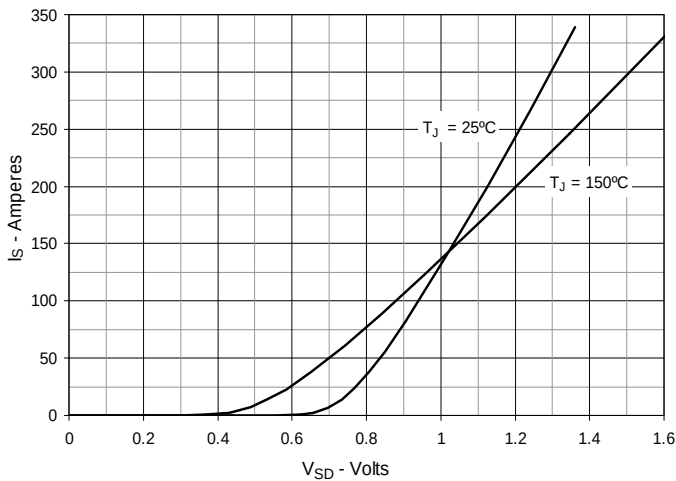

**Fig. 10. Gate Charge**

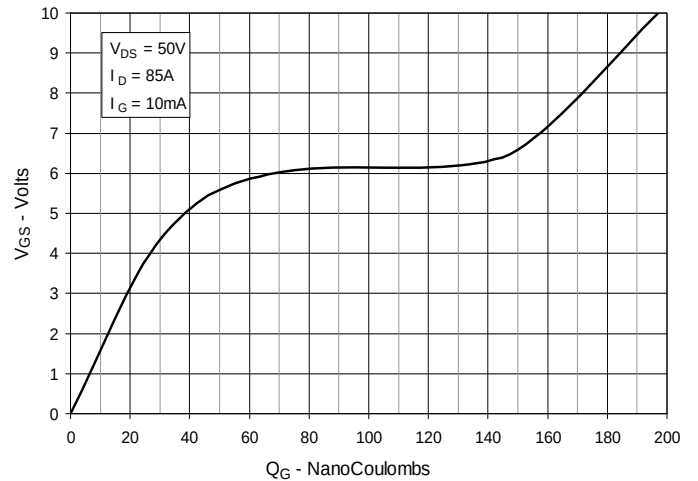

**Fig. 11. Capacitance**

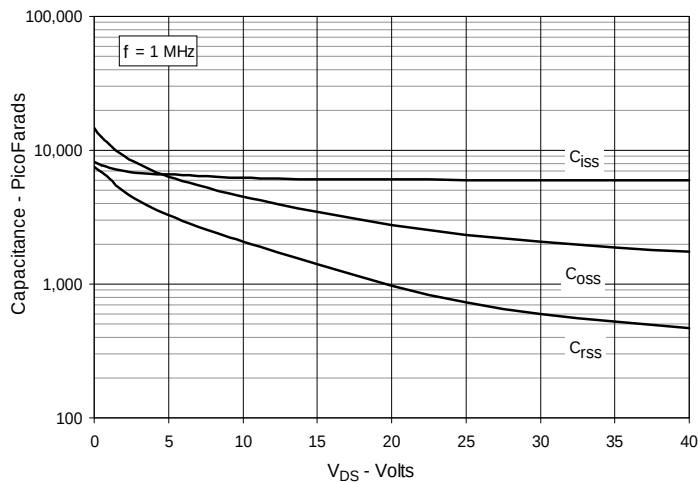

**Fig. 12. Forward-Bias Safe Operating Area**


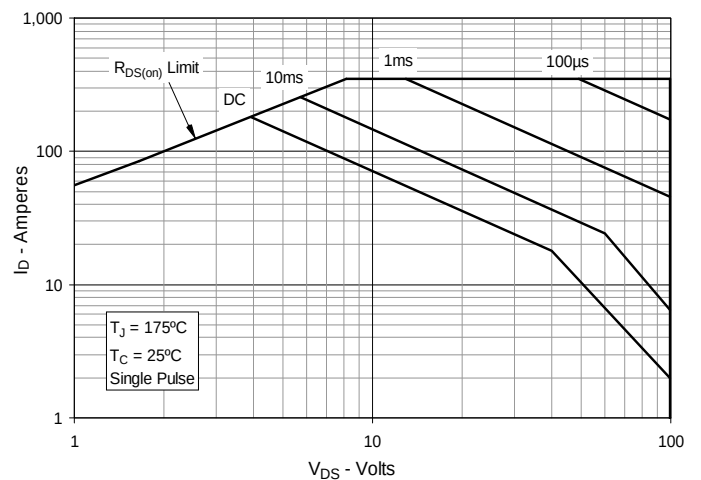


Fig. 13. Maximum Transient Thermal Impedance



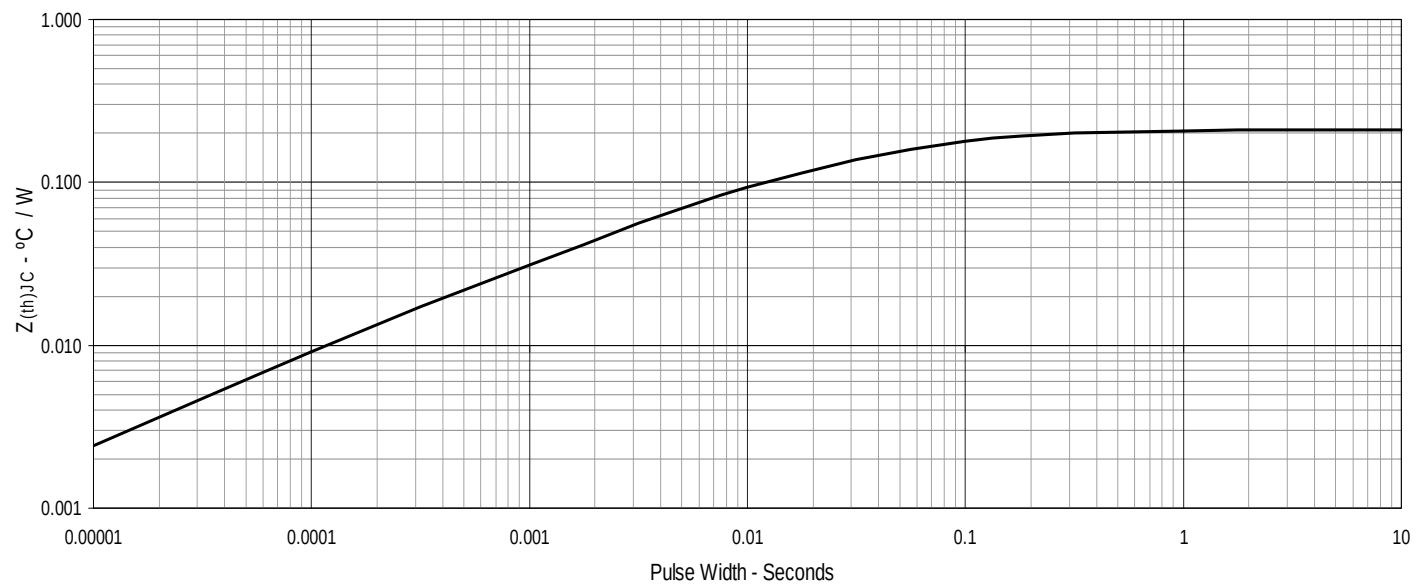

---

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).